## ULTRA NX, 120V WHT/SST STD-HDL

Height: 32.4" Width: 16.6" Depth: 26.4" (82.3cm) (42.2cm) (67.1cm)



- Patented beverage monitoring technology and reversing auger design ensure consistent, great tasting frozen beverages
- Enhanced auger drive system and seal design for long-lasting, reliable performance
- New leak capture feature helps reduce service costs and clean-up time
- BUNNlink compatible
- Two large product hoppers hold 3 gallons (11.4L) each to maximize serving capacity
- User interface communicates need for cleaning and maintenance
- LED lighted merchandisers in hopper lids bring high visibility to front- of-house applications
- · Low-product alert to minimize product outages
- Quick defrost feature to ensure beverage quality and maximize uptime
- Slide in hopper graphics allow quick and easy changes
- USB for easy software updates and downloads
- Optional faucet available for dispensing chilled (non-frozen) products
- Sanitation listings NSF 18 and NSF 6 (Dairy)
- R290 all-natural refrigerant provides a sustainable platform with extremely low Global Warming Potential

Additional Features

#### Agency:





#### **Specifications**

Product #: 58000.0003 Hoppers: Two

Autofill: None Refrigerant: R290

Flavors: 2 Flavors Dispense: Pull & Hold

Finish: Stainless/White Handle: Standard Handle

### **Electrical & Capacity**

| Volts* | Amps | Watts | Cord<br>Attached | Plug Type  | Plug Type 8oz cups/hr<br>236ml cups/hr |               | Phase | # Wires<br>plus Ground | Hertz |
|--------|------|-------|------------------|------------|--|---------------|-------|------------------------|-------|
| 120    | 12   | 1440  | Yes              | NEMA 5-15P | -                                      | 60°F (15.5°C) | 1     | 2                      | 60    |

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

### Plumbing Requirements


|     | J 1 |                  |                           |  |  |  |
|-----|-----|------------------|---------------------------|--|--|--|
| PSI | kPa | Fitting Supplied | Water Flow Required (GPM) |  |  |  |
| -   | -   | -                | -                         |  |  |  |


#### **CAD Drawings**


| 2D | Revit | KLC |
|----|-------|-----|
| •  |       |     |


MARNING:







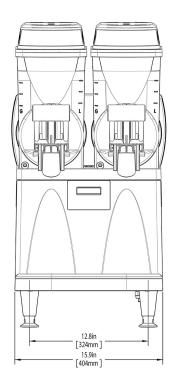

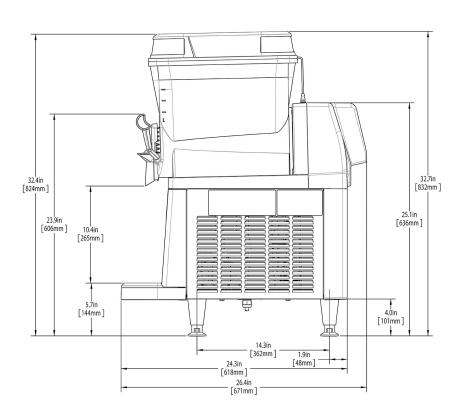

| Unit    |          |          |          | Shipping |          |          |             |            |
|---------|----------|----------|----------|----------|----------|----------|-------------|------------|
|         | Height   | Width    | Depth    | Height   | Width    | Depth    | Weight      | Volume     |
| English | 32.4 in. | 16.6 in. | 26.4 in. | 43.9 in. | 20.5 in. | 25.9 in. | 121.510 lbs | 13.468 ft³ |
| Metric  | 82.3 cm  | 42.2 cm  | 67.1 cm  | 111.4 cm | 52.1 cm  | 65.7 cm  | 55.117 kgs  | 0.381 m³   |



# Related Products & Accessories: ULTRA NX, 120V WHT/SST STD-HDL(58000.0003)

FILTER, AIR 13.562 X HANDLE, FAUCET KIT, FAUCET SEALS -KIT, LID LOCK ULTRA KIT, HDL LOCK ULTRA-2 11.062 MAGNETIC ULTRA BLK NYLON AM **ULTRA-2 SEALS** NX SST CLR Product #: 28122.0002 Product #: 32265.0003 Product #: 32268.1000 Product #: 34996.0004 Product #: 34996.0009 HANDLE, EXTENDED KIT, LID & HDL LOCK KIT, LID LOCK ULTRA-2 KIT,LID & HDL LOCK DRIP TRAY ASSY, BASE ULTRA NX BLK NYLON ULTRA NX SST CLR SST CLR W/ NX LID ULTRA-2 SST CLR W/ NX **ULTRA NX - WHT** AM Product #: 34996.0011 Product #: 34996.0013 Product #: 34996.0014 Product #: 44614.0004 Product #: 57659.1000

DRIP TRAY COVER, ULTRA NX - WHT

Product #: 57660.0000

VALVE, FAUCET LIQUID BLACK ULTRA NX

Product #: 57793.0001



Product #: 58054.0000



| Serving & Holding Options: ULTRA NX, 120V WHT/SST STD-HDL(58000.0003) |
|---|
|---|

\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*

