# ULTRA NX, 120V BLK STD-HDL

Height: 32.4" Width: 16.6" Depth: 26.4" (82.3cm) (42.2cm) (67.1cm)



- Patented beverage monitoring technology and reversing auger design ensure consistent, great tasting frozen beverages
- Enhanced auger drive system and seal design for long-lasting, reliable performance
- New leak capture feature helps reduce service costs and clean-up time
- BUNNlink compatible
- Two large product hoppers hold 3 gallons (11.4L) each to maximize serving capacity
- User interface communicates need for cleaning and maintenance
- LED lighted merchandisers in hopper lids bring high visibility to front- of-house applications
- · Low-product alert to minimize product outages
- Quick defrost feature to ensure beverage quality and maximize uptime
- Slide in hopper graphics allow quick and easy changes
- USB for easy software updates and downloads
- Optional faucet available for dispensing chilled (non-frozen) products
- Sanitation listings NSF 18 and NSF 6 (Dairy)
- R290 all-natural refrigerant provides a sustainable platform with extremely low Global Warming Potential

Additional Features

#### Agency:





#### **Specifications**

Product #: 58000.0014

Autofill: None

Flavors: 2 Flavors

Finish: Black

Hoppers: Two

Refrigerant: R290

Dispense: Pull & Hold

Handle: Standard Handle

## **Electrical & Capacity**

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
120	12	1440	Yes	NEMA 5-15P	-	60°F (15.5°C)	1	2	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

### Plumbing Requirements


	3 1					
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)			
-	-	-	-			


#### **CAD Drawings**


2D	Revit	KLC
•		


MARNING:







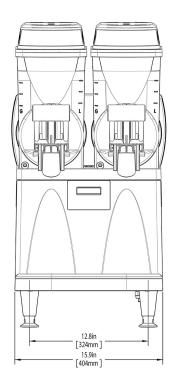

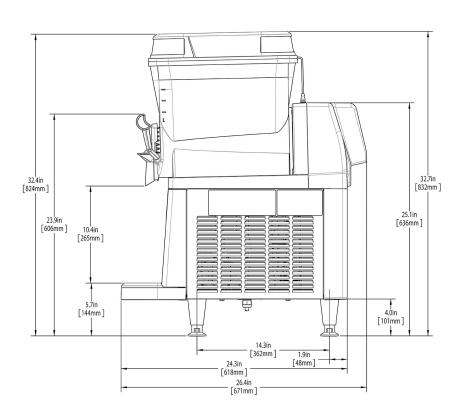

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	32.4 in.	16.6 in.	26.4 in.	43.9 in.	20.5 in.	25.9 in.	121.510 lbs	13.468 ft³
Metric	82.3 cm	42.2 cm	67.1 cm	111.4 cm	52.1 cm	65.7 cm	55.117 kgs	0.381 m³



# Related Products & Accessories: ULTRA NX, 120V BLK STD-HDL(58000.0014)

FILTER, AIR 13.562 X HANDLE, FAUCET KIT, FAUCET SEALS -KIT, LID LOCK ULTRA KIT, HDL LOCK ULTRA-2 11.062 MAGNETIC ULTRA BLK NYLON AM **ULTRA-2 SEALS** NX BLACK Product #: 28122.0002 Product #: 32265.0003 Product #: 32268.1000 Product #: 34996.0004 Product #: 34996.0010 HANDLE, EXTENDED DRIP TRAY ASSY, BASE KIT, LID & HDL LOCK KIT, LID LOCK ULTRA-2 KIT,LID & HDL LOCK ULTRA NX BLK NYLON ULTRA NX BLK SST CLR W/ NX LID ULTRA-2 SST CLR W/ NX ULTRA NX - BLK AM Product #: 34996.0012 Product #: 57659.1001 Product #: 34996.0013 Product #: 34996.0014 Product #: 44614.0004 DRIP TRAY COVER, VALVE, FAUCET LIQUID ULTRA NX - BLK **BLACK ULTRA NX** 



Product #: 57660.0001

Product #: 57793.0001

Serving & Holding Options: ULTRA NX, 120V BLK STD-HDL(58000.0014)
---

\*Serving and Holding selections are currently unavailable. Please contact your sales representative to find out more information.\*

