

# ED3-72 Display Case

UL

ALTO-SHAAM

Drive foodservice profits with display cases from Alto-Shaam. LED lighting and mirrored back doors enhance food appearance and boost impulse sales. To not only look but taste great, food is held at optimal, precise temperatures with Halo Heat® technology and top ceramic heaters. Multiple access points and a removable back work shelf makes unloading and loading food effortless for employees. Reduce labor and cleaning time with removable back doors and side panels, and a lifting glass front.



ED3-72 with Legs



ED3(SYS)-72  
With Stationary Base

## Standard features

- Fanless, waterless Halo Heat technology
- Overhead LED lighting
- Adjustable thermostats 1-10 per heat zone for top and bottom heat
- Ceramic top heaters
- Operator-side work shelf and cutting board
- Sliding back doors with mirrored glass
- Tempered glass front with self-supported lifting mechanism
- Removable back doors and side glass panels
- One set of 4" [102mm] legs with rubber feet
- Five [5] pan zones to hold standard pan sizes [GN]
- Two [2] heat zones
- Two [2] heat-on indicator lights
- Four [4] long pan dividers [1002584]
- Five [5] short pan dividers [1002621]
- Fifteen [15] short pan dividers [11318]

## Configuration

- ☐ ED3-72 with 4-inch legs and rubber feet [standard]
- ☐ ED3(SYS)-72 with stationary base

## Electrical

- ☐ 208V, 50/60 Hz, 1PH
- ☐ 240V, 50/60 Hz, 1PH

## Options and Accessories

### Panel Color [select one]

- ☐ Black, standard
- ☐ Stainless steel, optional

### End Glass [select one]

- ☐ Clear glass, standard
- ☐ Solar bronze glass, optional..... [5011353]

### Additional

- ☐ Temperature gauge..... [GU-48153]
- ☐ Right-mounted scale platform ..... [5001307]
- ☐ Left-mounted scale platform ..... [5001308]
- ☐ Work shelf with gravy lane ..... [5005639]
- ☐ Pan insert [4" deep [100mm] ..... [1001990]
- ☐ 1/3 Pan cover-up bar ..... [1008014]
- ☐ Sheet pan divider bar package ..... [5002803]

### Extended warranty

- ☐ One-year warranty extension

| Pan* Capacity                              |                              |  |      |
|--------------------------------------------|------------------------------|--|------|
| Pan Size                                   | Pan Dimensions               |  | Qty. |
| Full-Size & One-Third**:                   | 12" x 20" x 2-1/2" [GN 1/1]  |  | 5    |
|                                            | 12" x 6" x 2-1/2" [GN 1/3]   |  | 5    |
| Half-Size & One-Third**:                   | 12" x 10" x 2-1/2" [GN 1/2]  |  | 10   |
|                                            | 12" x 6" x 2-1/2" [GN 1/3]   |  | 5    |
| Full-Size Sheet Pans:                      | 18" x 26" x 1"               |  | 3    |
| Max. Capacity/Volume:                      | 80 lbs [36 kg] 50 qts [60 L] |  |      |
| * Pans are not included with display case. |                              |  |      |
| ** Will also accept 4" [100mm] deep pans.  |                              |  |      |




# ED3-72 Display Case



## DIMENSIONS

### ED3-72 with Legs

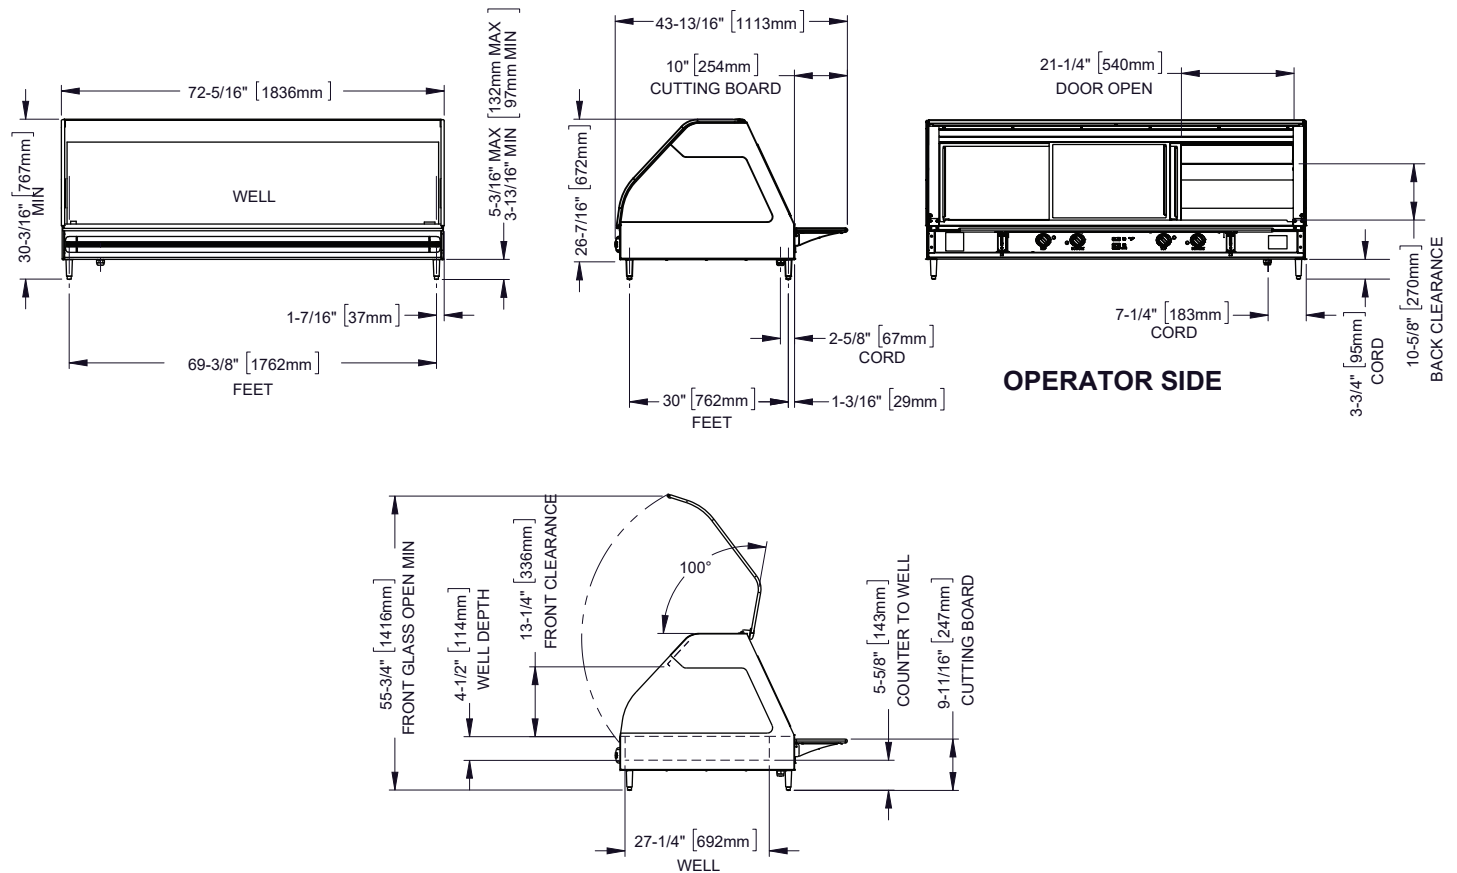

| Model          | Exterior (H x W x D)                                                              | Well (W x L x D)                                     | Net Weight      |
|----------------|-----------------------------------------------------------------------------------|------------------------------------------------------|-----------------|
| ED3-72<br>Legs | 30-3/16" x 72-5/16" x 43-13/16" [767mm x 1836mm x 1113mm]                         | 27-1/4" x 69-5/16" x 4-1/2" [692mm x 1761mm x 114mm] | 419 lb [190 kg] |
|                | <b>Ship Dimensions (H x W x D)*</b><br>45" x 85" x 55" [1143mm x 2159mm x 1397mm] | <b>Ship Weight*</b><br>465 lb [210 kg]               |                 |


\*Domestic ground shipping information. Contact factory for export weight and dimensions.

# ED3-72 Display Case



## DIMENSIONS

### ED3(SYS)-72 with Stationary Base

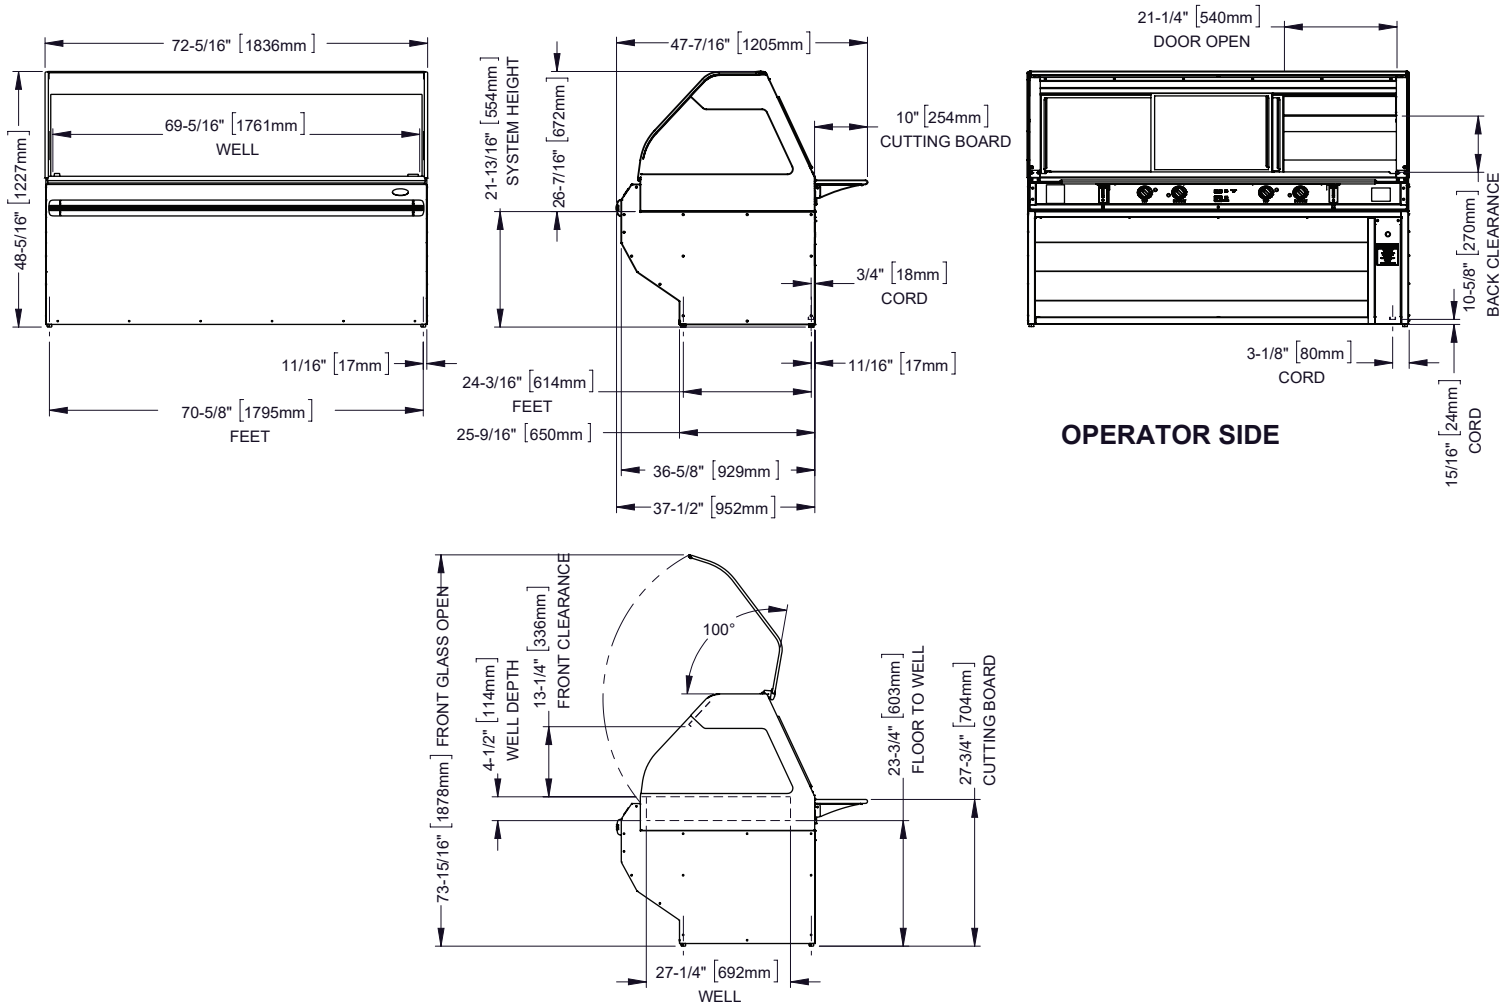

#### Model

ED3-72  
SYS

#### Exterior (H x W x D)

48-5/16" x 72-5/16" x 47-7/16" [1227mm x 1836mm x 1205mm]

#### Well (W x L x D)

27-1/4" x 69-5/16" x 4-1/2" [692mm x 1761mm x 114mm]

#### Net Weight

621 lb [282 kg]

#### Ship Dimensions (H x W x D)\*


65" x 85" x 55" [1651mm x 2159mm x 1397mm]

#### Ship Weight\*

700 lb [317 kg]

\*Domestic ground shipping information. Contact factory for export weight and dimensions.

ED3 Pan Configurations

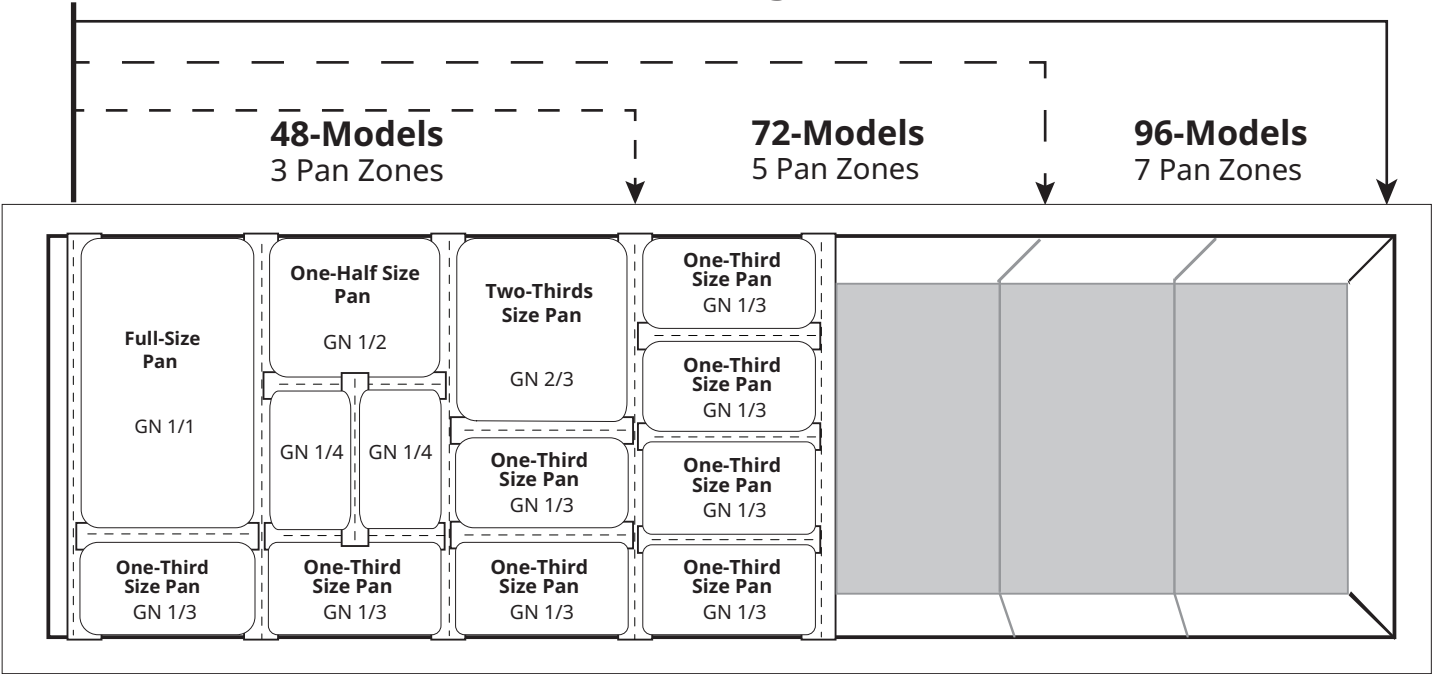

REQUIREMENTS

Installation Requirements

- The display case must be installed level.
- The display case must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Do not install a heated display case near a cold air source such as a freezer, air conditioning vents, or in any area where outside air fluctuation can affect performance.



HEAT

Heat of rejection

| ED3-96 | Heat Gain qs,<br>BTU/hr | Heat Gain qs,<br>kW |
|--------|-------------------------|---------------------|
|        | 456                     | 0.13                |



72 Series

| ED3-72<br>With feet | V   | Ph | Hz    | AWG*<br>minimum | A    | Breaker<br>minimum | kW   | Connection       |
|---------------------|-----|----|-------|-----------------|------|--------------------|------|------------------|
|                     | 208 | 1  | 50/60 | 14              | 15.0 | 19A                | 3.11 | 6ft; NEMA 6-30 Ⓢ |
|                     | 240 | 1  | 50/60 | 14              | 17.2 | 22A                | 4.14 | 6ft; NEMA 6-30 Ⓢ |

\*Recommended minimum conductor sized at 90°C and ambient 30°C.  
Electrical connections must meet all applicable federal, state, and local codes.

| ED3-72<br>With base | V   | Ph | Hz    | AWG*<br>minimum | A    | Breaker<br>minimum | kW   | Connection       |
|---------------------|-----|----|-------|-----------------|------|--------------------|------|------------------|
|                     | 208 | 1  | 50/60 | 14              | 15.0 | 19 A               | 3.11 | No cord, no plug |
|                     | 240 | 1  | 50/60 | 14              | 17.2 | 22 A               | 4.14 | No cord, no plug |

\* Recommended minimum conductor sized at 90°C and ambient 30°C.  
Electrical connections must meet all applicable federal, state, and local codes.

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.  
Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | [alto-shaam.com](http://alto-shaam.com)