

HSM Series

Heated Shelf Merchandiser

HSM-36/2S/T[F], HSM 36/3S/T & HSM-36/5S/T

UL

Featuring exclusive Halo Heat® technology, Alto-Shaam heated shelf merchandisers provide precise top and bottom heat for the highest quality prepared food and longer hold times.

Hold a variety of grab-and-go products, including rotisserie chickens, pizza, sandwiches, and more. Drive foodservice profits with hot, ready-to-eat meals. Convenient, fresh meals are displayed in an aesthetically pleasing, customizable merchandiser.

Experience better quality food with gentle, even and precise Halo Heat fanless technology to keep food from drying out.

Flexibility to control individual shelf temperatures allows you to hold a variety of products at the proper temperature.

Boost impulse sales with LED-lighted shelves, customized branding, backlit interchangeable graphics, pricing rails and window sides.

Simple operation and easy cleaning keeps delis and grab-and-go areas operating smoothly.

Easy-to-load shelves—pass-through option available for added convenience.

Made in the USA with a commitment to quality. Alto-Shaam is ISO 9001:2015-certified.

Standard Features

- Adjustable thermostat per shelf with a heat-on indicator light
- Latched access panel on the front of the merchandiser
- Four casters for floor models
- Four adjustable feet for countertop model

16 HSM-36/2S/T[F]:
Two (2) 32-7/8" [835mm] width shelves,
Eight (8) chicken boats with dome cover per shelf.

24 HSM-36/3S/T:
Three (3) 32-7/8" [835mm] width shelves,
Eight (8) chicken boats with dome cover per shelf.

40 HSM-36/5S/T:
Five (5) 32-7/8" [835mm] width shelves,
Eight (8) chicken boats with dome cover per shelf.

HSM-36/2S/T[F]: 48 lb [22 kg] 24 lb [11 kg] per shelf

HSM-36/3S/T: 72 lb [33 kg] 24 lb [11 kg] per shelf

HSM-36/5S/T: 120 lb [54 kg] 24 lb [11 kg] per shelf

- Merchandiser must be installed level.
- Merchandiser must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

ALTO-SHAAM

HSM-36/5S/T

HSM-36/3S/T



HSM-36/2S/T



HSM-36/2S/T/F

Configurations (select one)

Model

- ☐ HSM-36/2S/T ☐ HSM-36/3S/T
☐ HSM-36/2S/T/F ☐ HSM-36/5S/T

Electrical

- ☐ 120V, 1PH (HSM-36/2S/T or HSM-36/2S/T/F only)
☐ 208–240V, 1PH

Door Options

- ☐ None (reach-in models only)
☐ Rear slide (pass-through models only)
☐ Rear swing (pass-through models only)
☐ Front swing (reach-in and pass-through models)

Legs or Casters (floor standing)

- ☐ 4"–6" [102mm–153mm] adjustable leg package [5025454]
☐ 3" [76mm] casters [Standard]

Legs or Display Base (countertop)

- ☐ 4"–6" [102mm–153mm] adjustable legs: [Standard] [5023337]
☐ HSM-36/3S Display Base, with casters [5026176]
☐ HSM-36/3S Display Base, with legs [5026182]

Accessories (select all that apply)

- ☐ Wire shelf (rack) SH-46067
☐ Spacer for wire shelf 5033364

Note: Unit ships without graphics unless selected

- ☐ Signage panel, POP Display
☐ Signage panel, shelf — Rotisserie Chicken
☐ Signage panel, shelf — Hot Sandwiches
☐ Signage panel, shelf — Barbecue Ribs
☐ Signage panel, shelf — Hot & Tasty
☐ Signage panel, shelf — Grab & Go
☐ Signage panel, shelf — Hot & Fresh
☐ Shelf insert for magnetic signage panels, HSM-36 [1027305].
Magnetic signage panels to be provided by customer.

Signage dimensions:

- POP display: 8.06" [205mm] x 22.81" [579mm]
- Shelf: 1.8" [46mm] x 20.6" [523mm]



CAPACITY



CAPACITY












REQUIREMENTS



HSM Series





HSM-36/5S/T

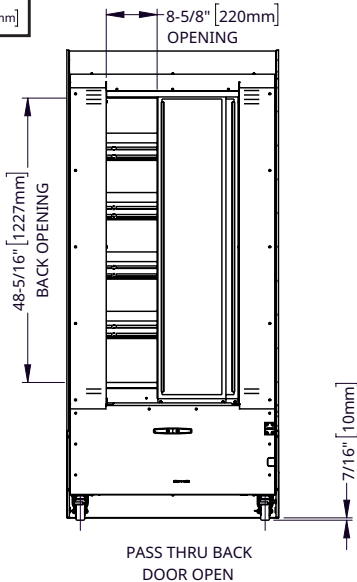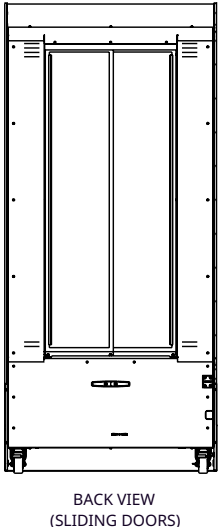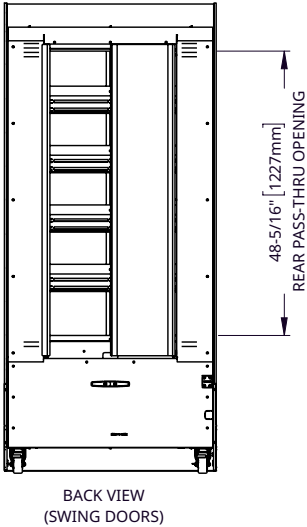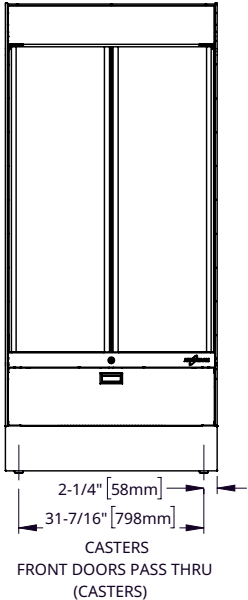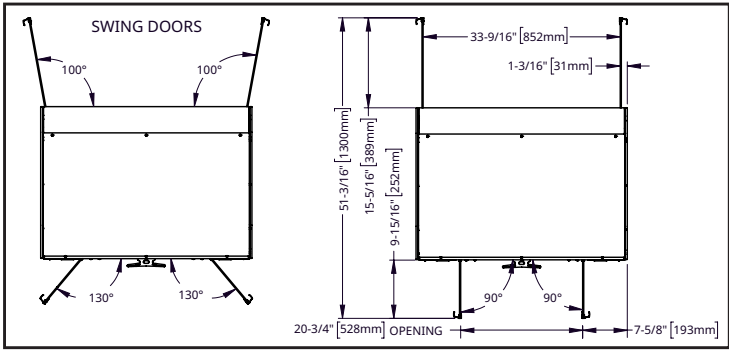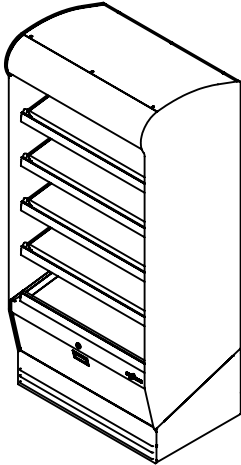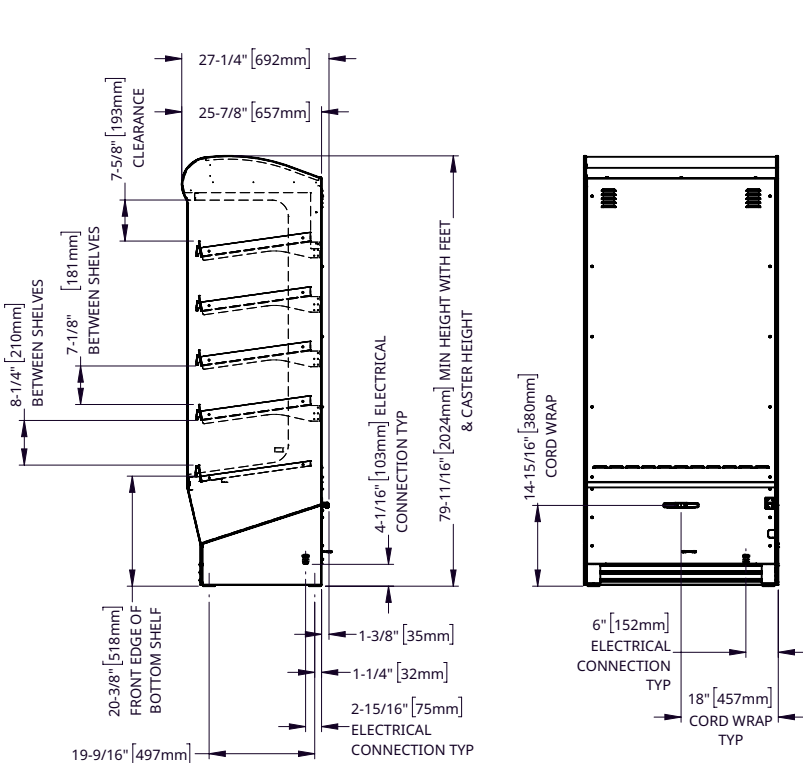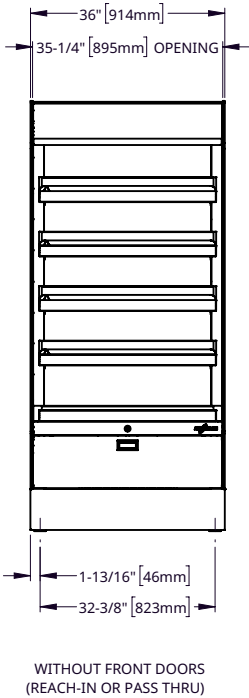


HSM Series

HSM-36/3S/T



ALTO-SHAAM

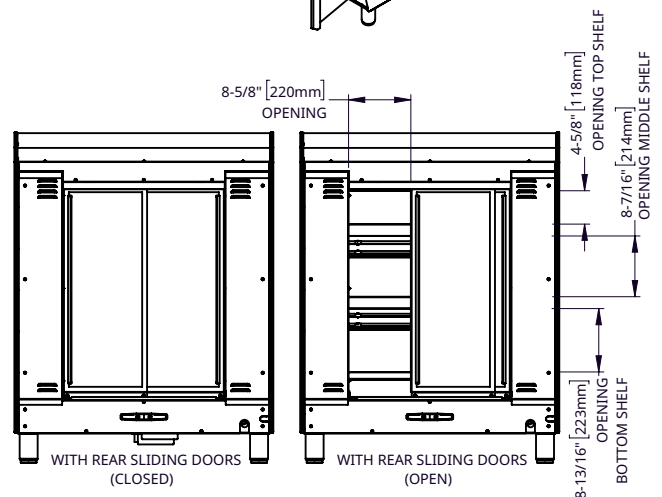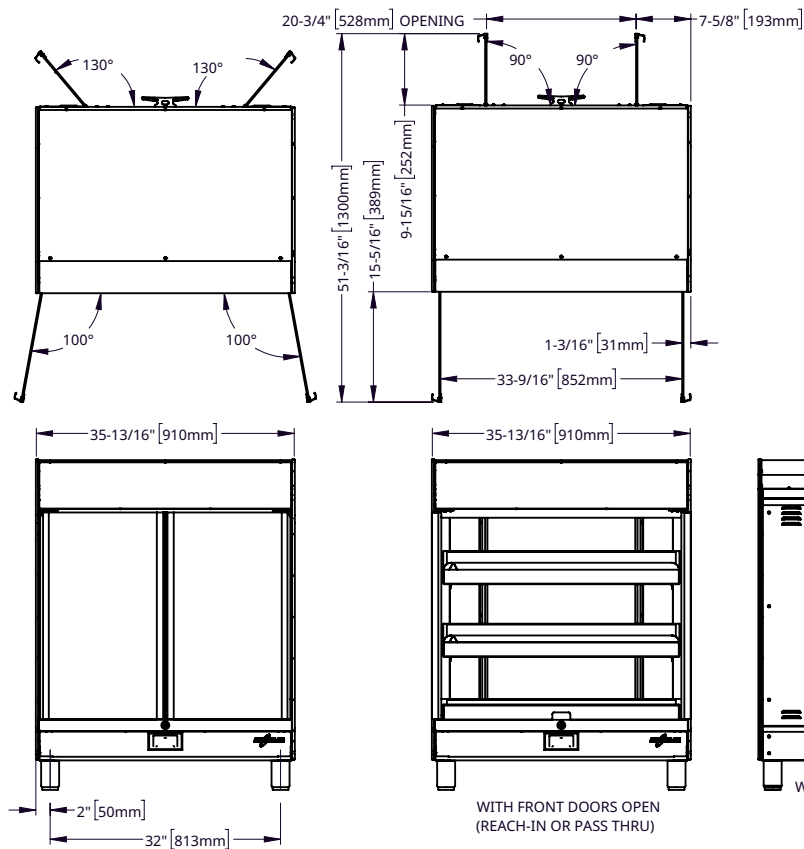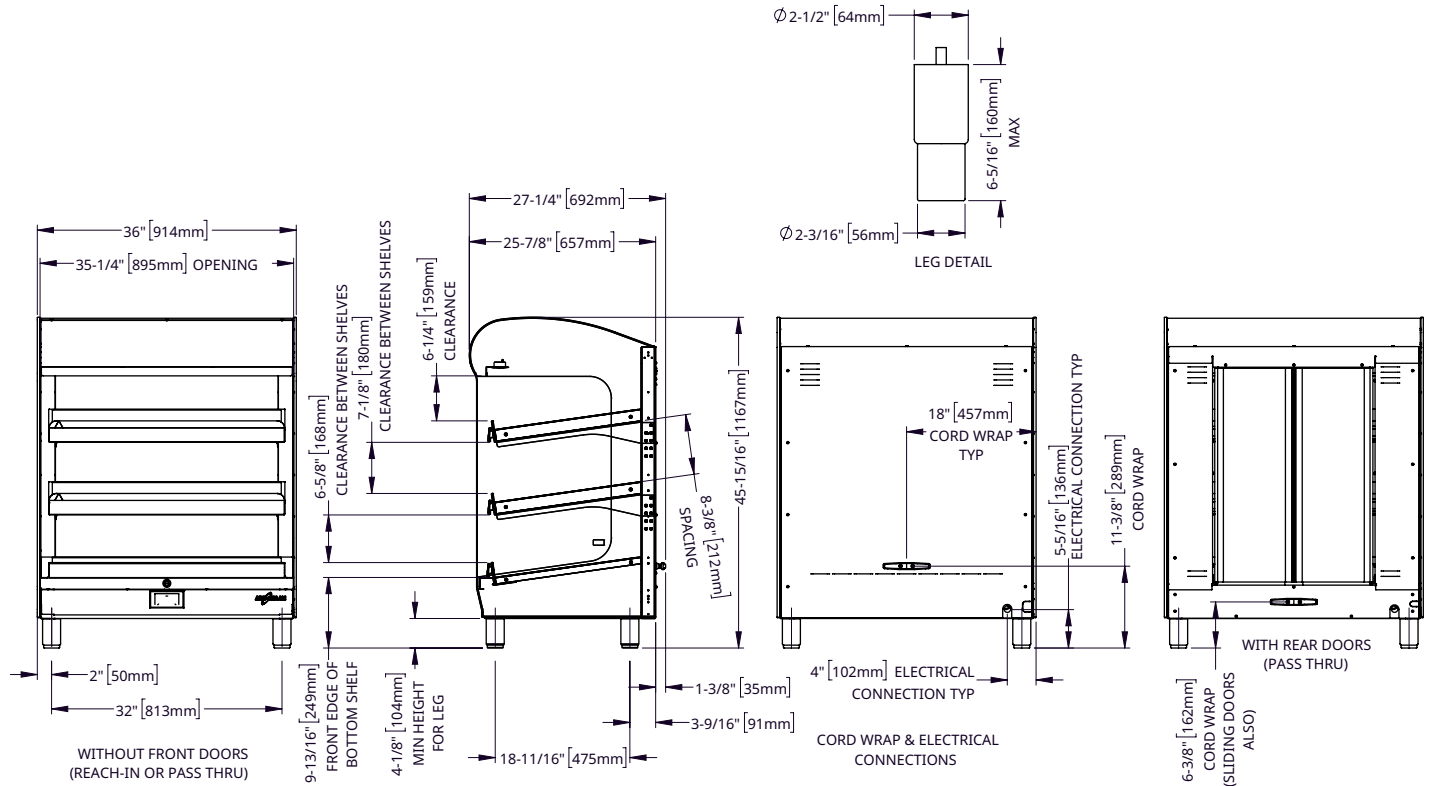



HSM Series
HSM-36/3S/T With Base

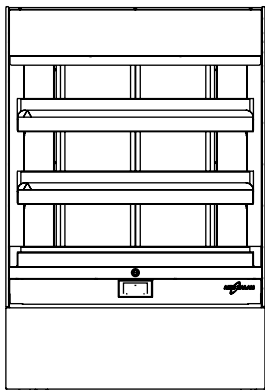


WITHOUT FRONT DOORS
(REACH-IN OR PASS THRU)
DECORATIVE BASE

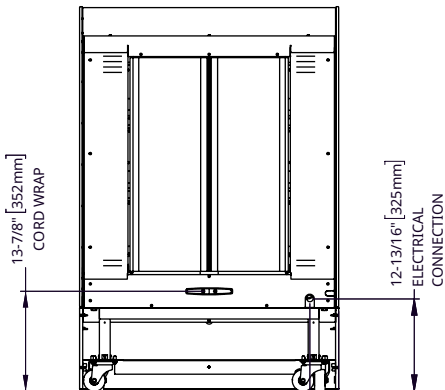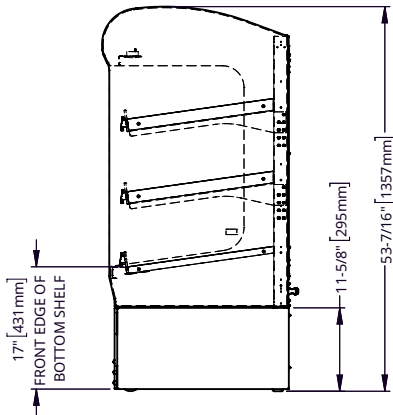



CORD WRAP & ELECTRICAL
CONNECTIONS

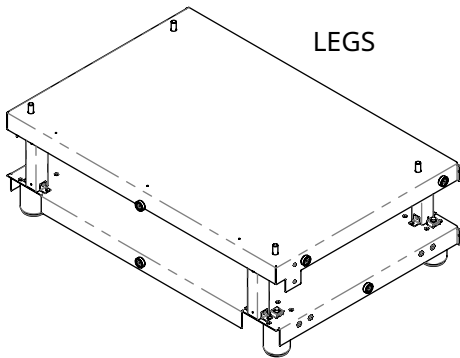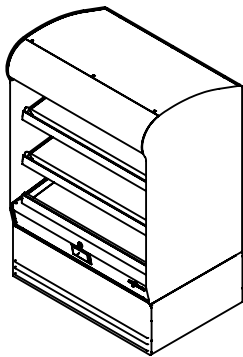


LEGS

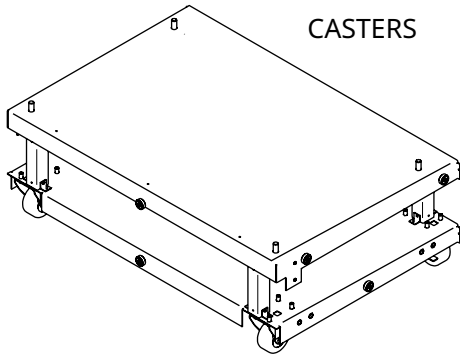



CASTERS

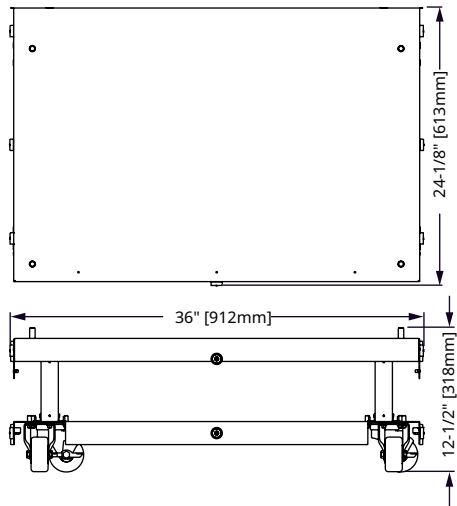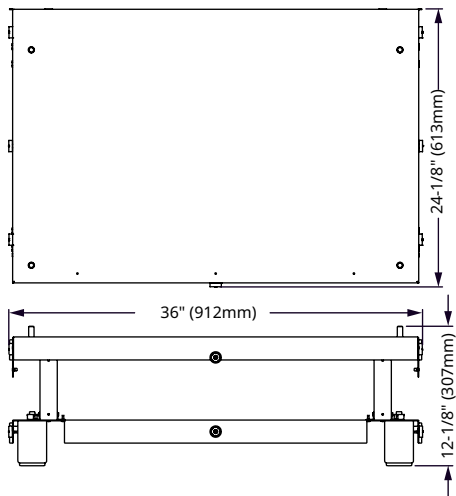



HSM Series
HSM-36/2S/T/F

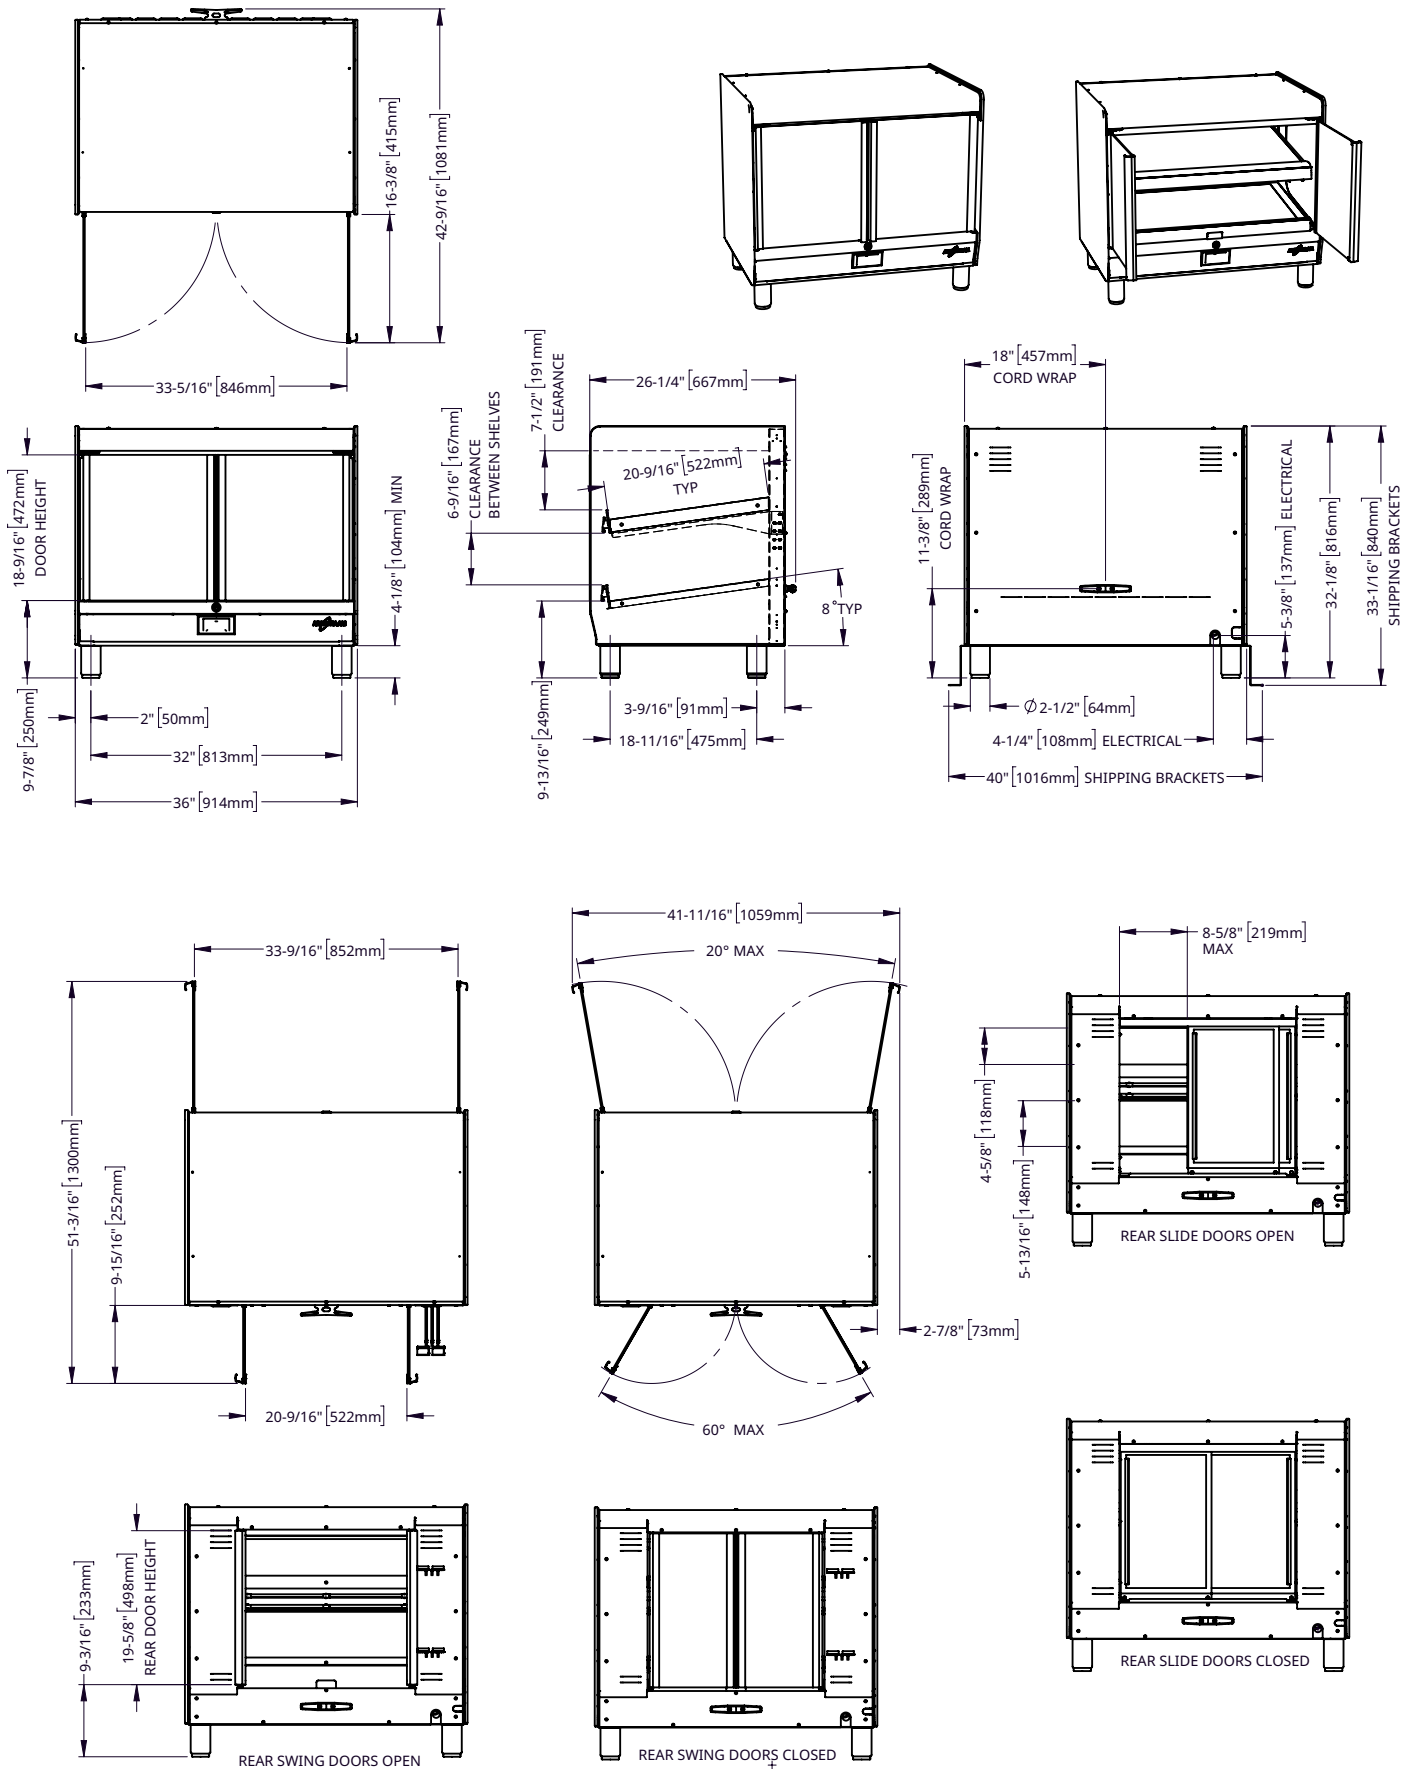






HSM Series
HSM-36/2S/T/F

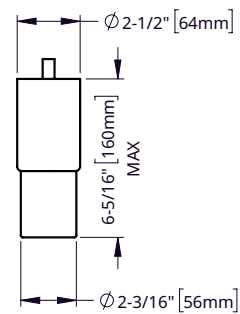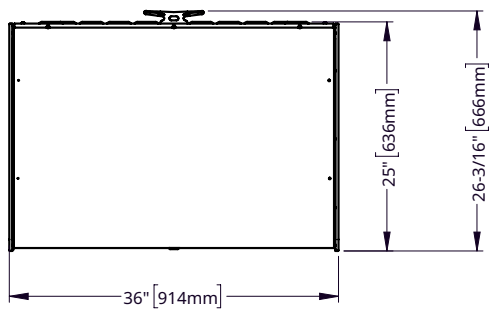


LEG DETAIL

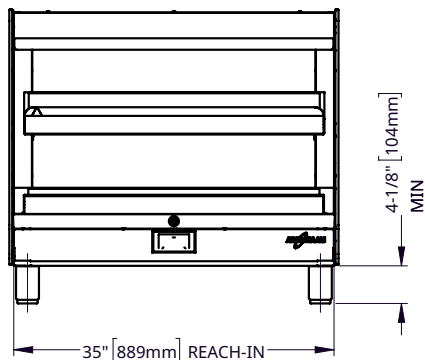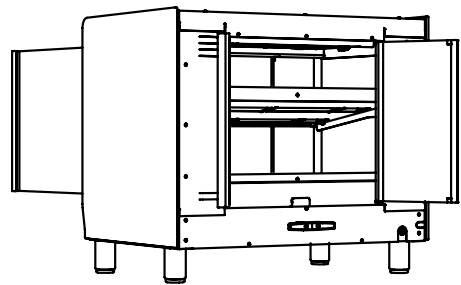



REACH-IN FRONT

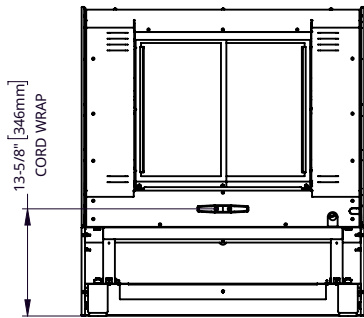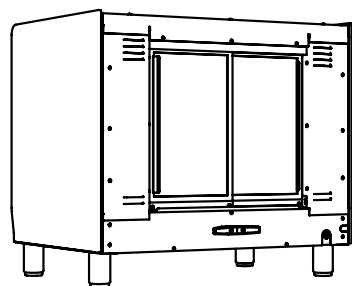

PASS THRU SLIDING DOORS REAR

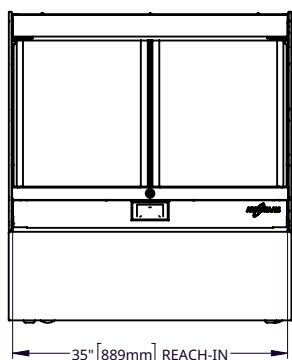

REACH-IN FRONT DOORS
DECORATIVE BASE

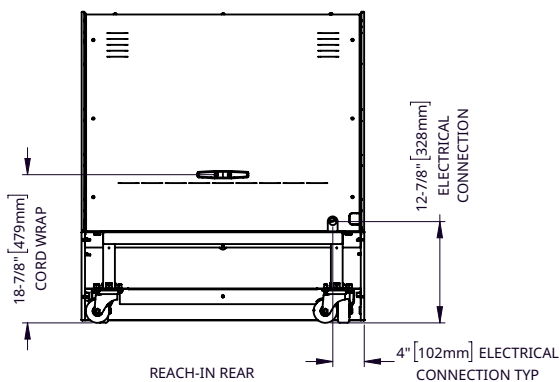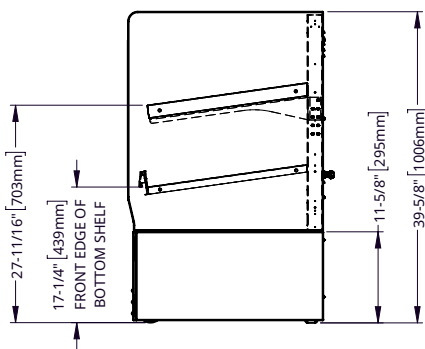

REACH-IN REAR

HSM Series

HSM-36/2S/T[F], HSM 36/3S/T & HSM-36/5S/T



DIMENSIONS

Model

HSM-36/2S/T	35-7/8" x 36" x 27-1/4" [910mm x 914mm x 692mm]
HSM-36/2S/T/F	32-1/8" x 36" x 26-1/4" [816mm x 914mm x 667mm]
HSM-36/3S/T	54" x 36" x 27-1/4" [1372mm x 914mm x 692mm]
HSM-36/5S/T	82-1/16" x 36" x 27-1/4" [2084mm x 914mm x 692mm]

Exterior [H x W x D]

Net Weight


224 lb [102 kg]
224 lb [102 kg]
311 lb [141 kg]
496 lb [225 kg]

Ship Dimensions [L x W x H]*

HSM-36/2S/T	56" x 45" x 64-1/2" [1422mm x 1143mm x 1638mm]
HSM-36/2S/T/F	56" x 45" x 64-1/2" [1422mm x 1143mm x 1638mm]
HSM-36/3S/T	56" x 45" x 64-1/2" [1422mm x 1143mm x 1638mm]
HSM-36/5S/T	56" x 45" x 87" [1422mm x 1143mm x 2210mm]

Ship Weight*

372 lb [169 kg]
372 lb [169 kg]
462 lb [210 kg]
590 lb [268 kg]

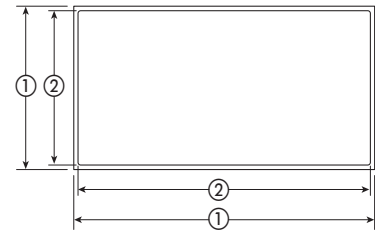

Shelf Dimensions [W x D]

① = Overall ② = Heated Surface

① 32-7/8" x 20-1/2" [835mm x 521mm]

② 31-7/8" x 19-1/2" [810mm x 495mm]





CLEARANCE

Rear: 4" [102mm]


Recommended: 18" [457mm] for service access.
Charges in connection with inadequate service access is not covered under warranty.



ELECTRIC

HSM-36/2S/T[F]	V	Ph	Hz	Awg	IEC	A	Breaker [A]	kW	Plug Configuration Options
120V	120	1	60	12	—	13.2	17	1.59	6' Cord NEMA 5-20P 
208-240V	208	1	50/60	14	—	5.8	9	1.21	6' Cord NEMA 6-15P 
	240	1	50/60	14	—	6.7	9	1.61	

Electrical connections must meet all applicable federal, state, and local codes.
Dedicated circuit required.

HSM-36/3S/T	V	Ph	Hz	Awg	IEC	A	Breaker [A]	kW	Plug Configuration Options
208-240V	208	1	50/60	14	—	8.8	13	1.82	6' Cord NEMA 6-15P 
	240	1	50/60	14	—	10.0	13	2.41	

Electrical connections must meet all applicable federal, state, and local codes.
Dedicated circuit required.

HSM-36/5S/T	V	Ph	Hz	Awg	IEC	A	Breaker [A]	kW	Plug Configuration Options
208-240V	208	1	50/60	8	—	14.6	21	3.0	9' Cord, no plug
	240	1	50/60	8	—	16.7	21	4.0	

Electrical connections must meet all applicable federal, state, and local codes.
Dedicated circuit required.



HEAT

Heat of rejection

	Heat Gain qs, BTU/hr	Heat Gain qs, kW
HSM-36/2S	158	0.05
HSM-36/3S	245	0.07
HSM-36/5S	393	0.12

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com