



**"WE MAKE THE KITCHEN BETTER!"**

**ATOSA USA, INC.**

**Toll Free: 855-855-0399 Email: [info@atosausa.com](mailto:info@atosausa.com)**

[www.atosa.com](http://www.atosa.com) | [www.atosausa.com](http://www.atosausa.com)

California, Colorado, Florida, Georgia, Illinois,  
New Jersey, Ohio, Texas, Washington

# Undercounter Refrigerators

## Standard Features

- Stainless steel exterior & interior
- Field reversible door(s)
- Environmentally friendly R290 refrigerant
- Electronic temperature controller
- Maintains temperatures between 35°F – 38°F
- Self-closing door(s) with stay open feature
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- One (1) pre-installed shelf per section

## Optional Accessories

- Field installable drawer cartridges
- Extended warranty up to 5 years

For the best results of food preservation we recommend setting your refrigerator between 35 °F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.

## MODELS:

**AUR27SD / AUR36SD / AUR48SD  
AUR60SD / AUR72SD**



**AUR27SD**



**AUR36SD**



**AUR48SD**



**AUR60SD**



**AUR72SD**



**2 YEAR PARTS AND LABOR WARRANTY  
5 YEAR COMPRESSOR PART WARRANTY**



REV. 07/25



**"WE MAKE THE KITCHEN BETTER!"**

**ATOSA USA, INC.**

**Toll Free: 855-855-0399 Email: [info@atosausa.com](mailto:info@atosausa.com)**

[www.atosa.com](http://www.atosa.com) | [www.atosausa.com](http://www.atosausa.com)


California, Colorado, Florida, Georgia, Illinois,  
New Jersey, Ohio, Texas, Washington

## SPECIFICATIONS


| Models  | Door | Capacity (Cu.Ft.) | Shelves | Casters (inch) | Rated Current (A) | Voltage (V/Hz/Ph) | HP  | Refrigerant | Exterior Dimensions (inch)              | Net Weight (lb) | Gross Weight (lb) |
|---------|------|-------------------|---------|----------------|-------------------|-------------------|-----|-------------|-----------------------------------------|-----------------|-------------------|
| AUR27SD | 1    | 6.4               | 1       | 2              | 2.3               | 115/60/1          | 1/6 | R290        | 27 <sup>1/2</sup> ×30×32 <sup>1/2</sup> | 137             | 168               |
| AUR36SD | 2    | 8.6               | 2       | 2              | 2.3               | 115/60/1          | 1/6 | R290        | 36 <sup>3/8</sup> ×30×32 <sup>1/2</sup> | 161             | 198               |
| AUR48SD | 2    | 11.8              | 2       | 2              | 2.3               | 115/60/1          | 1/6 | R290        | 48 <sup>1/4</sup> ×30×32 <sup>1/2</sup> | 182             | 249               |
| AUR60SD | 2    | 15                | 2       | 2              | 2.8               | 115/60/1          | 1/5 | R290        | 60 <sup>1/4</sup> ×30×32 <sup>1/2</sup> | 218             | 287               |
| AUR72SD | 3    | 18.2              | 3       | 2              | 2.8               | 115/60/1          | 1/5 | R290        | 72 <sup>5/8</sup> ×30×32 <sup>1/2</sup> | 254             | 335               |

## PLAN VIEW


**AUR27SD**








**AUR36SD**






**AUR48SD**



**AUR60SD**

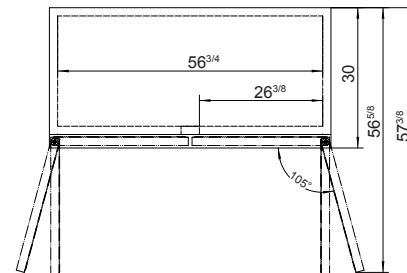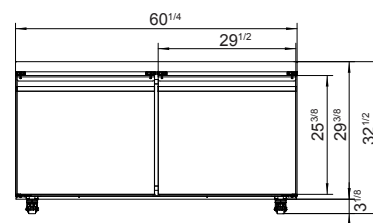

**AUR72SD**

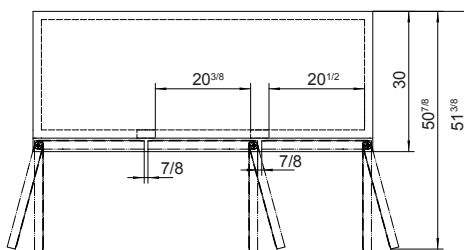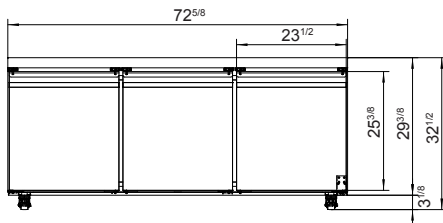

**SIDE VIEW**

**Casters**



**Epoxy shelves**



**Rear grate**



**Temperature control**



**NEMA 5-15P**

