

Countertop Heated Display Cases - Curved/Square

Standard Features

- Stainless steel exterior & interior
- Removable water pan to add humidity
- Electronic digital controller
- Three (3) stainless steel shelves standard
- Maintains temperatures between 86°F – 194°F
- Magnetic door gasket(s) standard for positive door seal
- Two(2) rear sliding glass doors
- LED interior lighting
- Leveling legs
- CHDC-44 and CHDS-53 use NEMA 5-15 plug
- CHDC-56 and CHDS-71 use NEMA 5-20 plug

MODELS:


CHDC-44 / CHDC-56 / CHDS-53 / CHDS-71




CHDC-44



CHDC-56

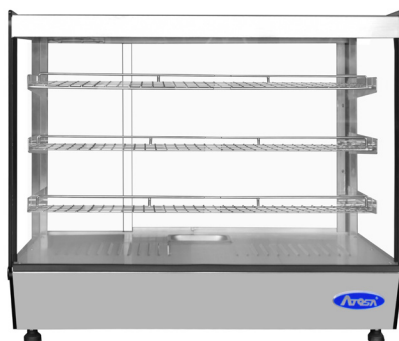

CHDS-53

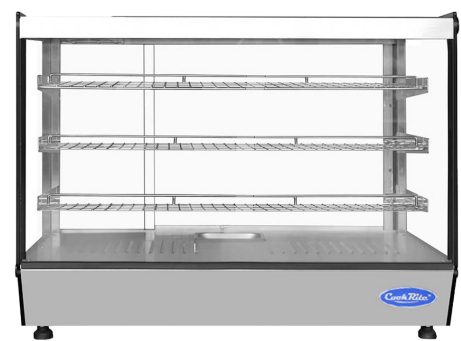

CHDS-71



1 YEAR PARTS AND LABOR WARRANTY (US ONLY)



Conforms to ANSI
STD Z83.11b-2009 (2011)
Certified for CUL
STD 1.BB-2009 (2011)
Conforms to NSF/ANSI STD.4





REV. 02/25

SPECIFICATIONS




Models	Door	Capacity (Cu.Ft.)	Shelves	Rated Current (A)	Voltage (V/Hz/Ph)	Leveling Legs (Inch)	Power (W)	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
CHDC-44	2	4.4	3	10.5	115/60/1	1.5	1250	28×22 ³ / ₄ ×26 ¹ / ₂	95	128
CHDC-56	2	5.7	3	13.7	115/60/1	1.5	1650	35 ⁷ / ₈ ×22 ³ / ₄ ×26 ¹ / ₂	108	154
CHDS-53	2	5.3	3	10.5	115/60/1	1.5	1250	28×22 ¹ / ₂ ×26 ¹ / ₂	101	135
CHDS-71	2	7.1	3	13.7	115/60/1	1.5	1650	35 ⁷ / ₈ ×22 ¹ / ₂ ×26 ¹ / ₂	121	168

PLAN VIEW



CHDC-44

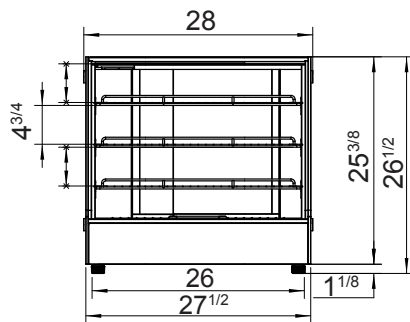




CHDC-56

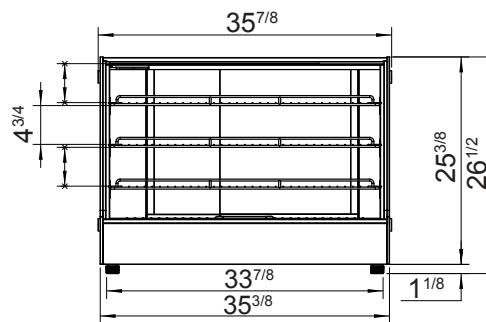


CHDS-53

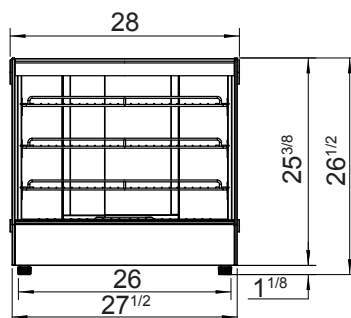

CHDS-71

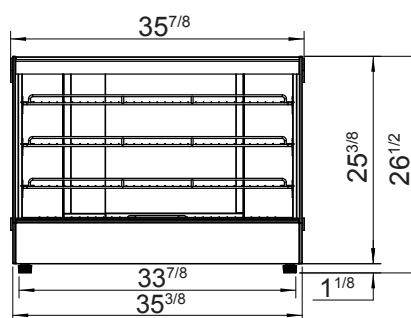

CHDC-44
CHDS-53



CHDC-56
CHDS-71

