



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

2 Section Dual Temp Refrigerator/ Freezer

Standard Features

- Top mount dual compressors with environmentally friendly R290 refrigerant
- Stainless steel exterior & interior
- Electronic temperature controller
- Freezer on left / refrigerator on right
- Refrigerator maintains temperatures between 35°F – 38°F
- Freezer maintains temperatures between -8°F – 0°F
- LED interior light(s)
- Recessed door handle(s)
- Door lock(s) standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- Three (3) pre-installed shelves per section
- Down duct refrigeration to ensure even distribution of air

Optional Accessories

- Extra shelves – includes 4 shelf clips per shelf
MBF8129GR shelf part #: W0402393

For the best results of food preservation we recommend setting your refrigerator between 35°F to 38 °F, freezer between -8°F to 0°F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



3 YEAR PARTS AND LABOR WARRANTY
5 YEAR COMPRESSOR PART WARRANTY

MODELS:

MBF8129GR



MBF8129GR



REV. 07/26



"WE MAKE THE KITCHEN BETTER!"

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com


www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,
New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
MBF8129GR	2	21.895	3+3	4	9.2	115/60/1	Left: 5/7 Right: 1/7	R290	51 ^{3/4} ×31 ^{1/2} ×81 ^{1/4}	353	403

PLAN VIEW

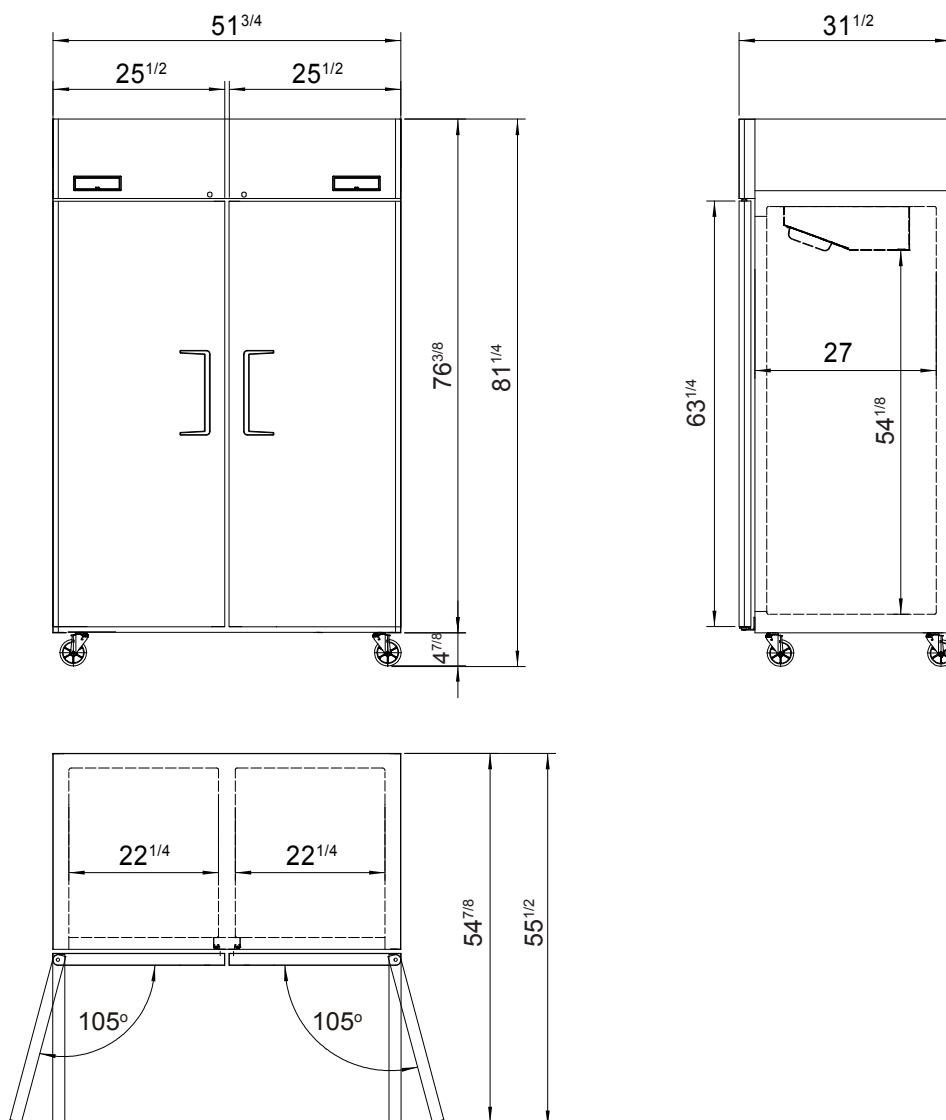

Casters

Epoxy shelves

Door lock

Down duct

Temperature control



NEMA 5-15P



NEMA
15A/125V