



“WE MAKE THE KITCHEN BETTER!”

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,

New Jersey, Ohio, Texas, Washington

# Bottom Mount Reach-In Refrigerators

## Standard Features

- Bottom mount compressor units with environmentally friendly R290 refrigerant
- Stainless steel exterior & interior
- Electronic temperature controller
- Maintains temperatures between 35°F – 38°F
- LED interior light(s)
- Recessed door handle(s)
- Door lock(s) standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters
- Three (3) pre-installed shelves per section
- Down duct refrigeration to ensure even distribution of air

## Optional Accessories

- Extra shelves – includes 4 shelf clips per shelf  
 MBF8519GR shelf part #: W0402316  
 MBF8532GR shelf part #: W0402315  
 MBF8505GR/GRL shelf part #: W0402393  
 MBF8507GR shelf part #: W0402387  
 MBF8508GR shelf part #: W0402387 left/right shelf,  
 part #: W0402388 middle shelf

For the best results of food preservation we recommend setting your refrigerator between 35°F to 38 °F

1. Don't forget to leave the unit some room to breathe!
2. Please clean the condenser frequently to give the unit more fresh air.



2 YEAR PARTS AND LABOR WARRANTY  
5 YEAR COMPRESSOR PART WARRANTY

## MODELS:

MBF8519GR / MBF8532GR / MBF8505GR  
MBF8505GRL / MBF8506GR / MBF8507GR / MBF8508GR



MBF8519GR



MBF8532GR



MBF8505GR



MBF8505GRL



MBF8506GR



MBF8507GR



MBF8508GR





**"WE MAKE THE KITCHEN BETTER!"**

**ATOSA USA, INC.**

**Toll Free: 855-855-0399 Email: info@atosausa.com**

www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois,


New Jersey, Ohio, Texas, Washington

## SPECIFICATIONS


Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	HP	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
MBF8519GR	1	8.3	3	2	2.1	115/60/1	1/7	R290	24 <sup>1/4</sup> × 24 × 63 <sup>1/4</sup>	176	209
MBF8532GR	1	12.57	3	4	2.1	115/60/1	1/4	R290	25 <sup>5/8</sup> × 26 × 76 <sup>3/8</sup>	232	276
MBF8505GR	1	19.1	3	4	2.1	115/60/1	1/7	R290	27 × 31 <sup>7/10</sup> × 83 <sup>1/10</sup>	249	282
MBF8505GRL	1	19.1	3	4	2.1	115/60/1	1/7	R290	27 × 31 <sup>7/10</sup> × 83 <sup>1/10</sup>	249	282
MBF8506GR	2	28.5	6	4	3.2	115/60/1	1/5	R290	39 <sup>1/2</sup> × 31 <sup>7/10</sup> × 83 <sup>1/10</sup>	317	365
MBF8507GR	2	43.8	6	4	3.2	115/60/1	1/5	R290	54 <sup>2/5</sup> × 31 <sup>7/10</sup> × 83 <sup>1/10</sup>	397	452
MBF8508GR	3	68	9	4	4.2	115/60/1	1/4	R290	81 <sup>9/10</sup> × 31 <sup>7/10</sup> × 83 <sup>1/10</sup>	538	615

## PLAN VIEW


**MBF8519GR**

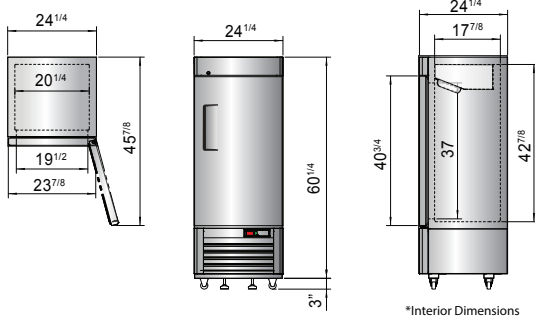

**MBF8532GR**

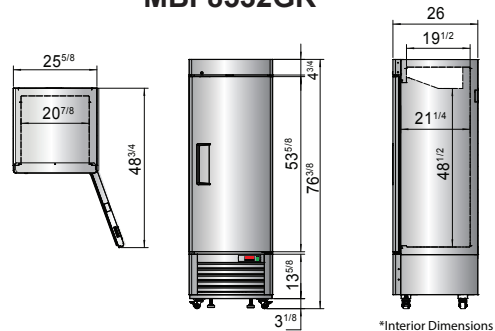



**MBF8505GR MBF8505GRL MBF8506GR**

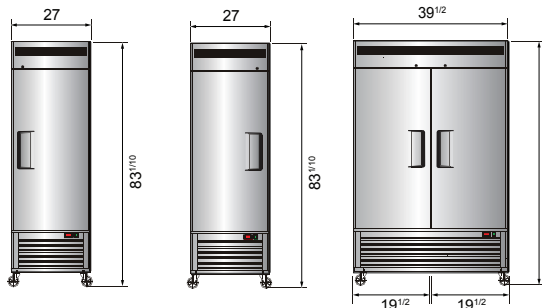

**MBF8507GR**



**MBF8508GR**

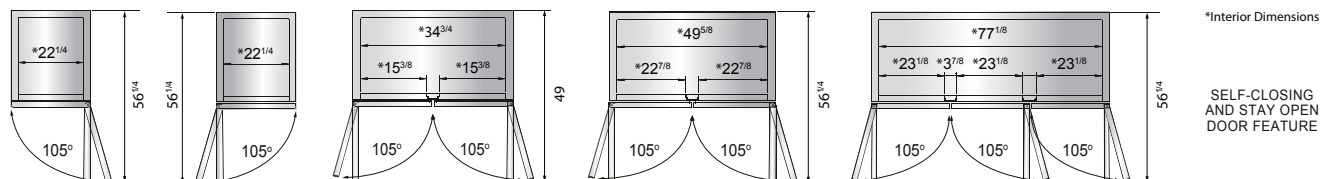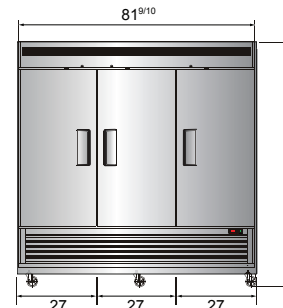

\*Interior Dimensions

SELF-CLOSING AND STAY OPEN DOOR FEATURE

Casters

Epoxy shelves


Door lock

Down duct

Temperature control



**NEMA 5-15P**



NEMA 15A/125V