

# AXIOM™ 12 Cup Automatic Coffee Brewer with 6 Warmers

## Features



**Model AXIOM 0/6 Twin**  
(decanter sold separately)

Dimensions: 20.5" H x 30.3" W x 17.7" D  
(52.1cm H x 77cm W x 45cm D)

### AXIOM Automatic Coffee Brewer

- Twin brew head systems.
- Brews 15 gallons (56.8 litres) of perfect coffee per hour.
- Six individually controlled warming stations.
- For high lime areas, BrewLOGIC™ technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARD™ technology simplifies brewer programming with a LCD display. Set brew level, cold brew lock-out and tank temperature from the front of the machine.
- Ensures coffee brew quality with cold brew lock out capability.
- All stainless steel construction.
- Includes hot water faucet.
- SplashGard® funnel deflects hot liquids away from the hand.
- Digital temperature control and accuracy.
- Electronic diagnostics and built-in tank drain make service easier.
- Coffee extraction controlled with programmable pre-infusion and pulse brew.
- Energy-saver mode reduces tank temperature during idle periods.

## Related Products

### Easy Clear® EQ-17-TL

Product No. : 30200.1000



### Easy Clear® ED-17-TL

Product No. : 30201.1001

### Paper Filter Pack

Product No. : 20115.6000

Packed per case: 1,000

Dimensions: 4 1/4" Base x 2 3/4" Sidewall

10.8 cm Base x 6.98 cm Sidewall



### Easy Pour® black decanter

Product No. : 06100.0201

Quantity: 1 (also packaged in quantities of 3 & 24)



### Easy Pour® orange decanter (decaf)

Product No. : 06101.0201

Quantity: 1 (also packaged in quantities of 3 & 24)



### WX1-warmer

Product No. : 06450.6000

One position warmer



### WX2-warmer

Product No. : 06310.6000

Two position warmer



## Model

AXIOM 0/6 Twin

## Agency Listing



# Dimensions & Specifications




Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic ft <sup>3</sup> /m <sup>3</sup>	Weight lbs/kg	Cord Attached
AXIOM 0/6 Twin	38700.6015	120/208-240	27.9	2 @ 3000	6700	15.0 gal/56.9 liter	11.64/0.32	74/33.6	No

**Brewing capacity:** based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: 120 volt, 15 amp. models require 2-wires plus ground service rated 120V, single phase, 60 Hz.  
If wired for 120/208V or 120/240V, required 3 wires plus ground service rated 120/208V or 120/240V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Machines supplied with 1/4" male flare fitting.

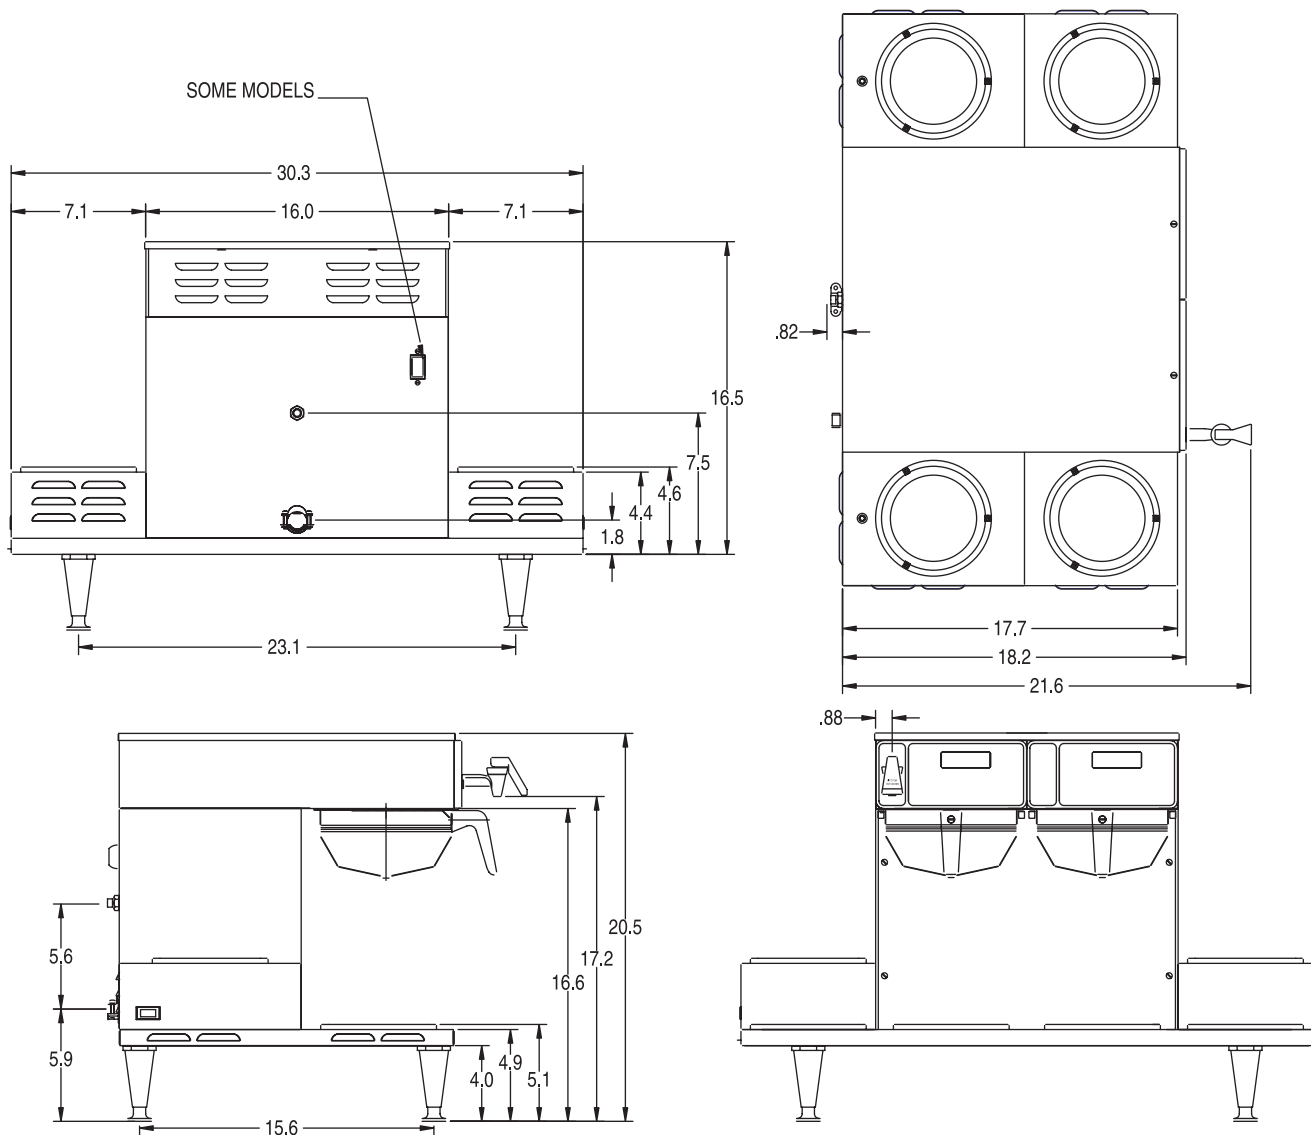

Bunn-O-Matic® Corporation of Canada • 280 Industrial Pkwy South, Aurora Ontario. L4G 3T9 • (905) 841-2866 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.

1/16 © Bunn-O-Matic Corporation