

AXIOM™ 12 Cup Automatic Coffee Brewer



Model AXIOM-3T
(decanters sold separately)
Dimensions: 18.9" H x 8.5" W x 17.7" D
(48cm H x 21.6cm W x 44.9cm D)



Model AXIOM-3
(decanters sold separately)
Dimensions: 16.8" H x 16.5" W x 17.7" D
(42.7cm H x 41.9cm W x 44.9cm D)

Features

AXIOM™ Automatic Coffee Brewers

- Large 200 oz. (5.9 liter) tank provides back-to-back brewing capacity.
- Adjusts automatically to varying water pressure.
- For high lime areas, BrewLOGICTM technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARDTM technology incorporates simplified programming with a LCD display. Set brew level, cold brew lock-out and tank temperature from the front of the machine.
- Electronic diagnostics and built in tank drain make service easier.
- Ensures coffee brew quality with cold brew lock out capability.
- SplashGard® funnel deflects hot liquids away from the hand.
- Coffee extraction controlled with pre-infusion or pulse brew and digital temperature control.
- Automatic warmer shut-off.
- Energy-saver mode reduces tank temperature during idle periods.
- Hot water faucet.

Related Products

Easy Clear® EQ-17-TL

Product No. : 30200.1000



Easy Clear® ED-17-TL

Product No. : 30201.1001

Paper Filter Pack

Product No. : 20115.6000

Packed per case: 1,000

Dimensions: 4¹/₄" Base x 2³/₄" Sidewall

10.8 cm Base x 6.98 cm Sidewall



Easy Pour® black decante

Product No. : 06100.0201

Quantity: 1 (also packaged in quantities of 3 & 24)



Easy Pour® orange decanter (decaf)

Product No. : 06101.0201

Quantity: 1 (also packaged in quantities of 3 & 24)



WX1-warmer

Product No. : 06450.6000

One position warmer



WX2-warmer

Product No. : 06310.6000

Two position warmer



Model

AXIOM-3T

AXIOM-3

Agency Listing



Dimensions & Specifications




| Model | Product # | Volts | Amps | Tank Htr Watts | Total Watts | Capacity per hour | Cubic ft ³ /m ³ | Weight lbs/kg | Cord Attached |
|--------------|------------|---------|------|----------------|-------------|-------------------|---------------------------------------|---------------|---------------|
| AXIOM-15-3T | 38700.6000 | 120 | 12.5 | 1150 | 1500 | 4.5 gal/17.1 L | 4/.113 | 30 / 13.6 | Yes |
| AXIOM-35-3T | 38700.6001 | 120/240 | 17.5 | 3500 | 3850 | 7.5 gal/28.4 L | 4/.113 | 30 / 13.6 | No |
| AXIOM-DV-3T | 38700.6008 | 120 | 12.5 | 1150 | 1500 | 3.8 gal/14.4 L | 4.0 | 30 / 1 | Yes |
| | | 120/208 | 13.9 | 2290 | 2640 | 6.7 gal/25.4 L | 4.0 | 30 / 1 | Yes |
| | | 120/240 | 15.7 | 3060 | 3410 | 7.5 gal/28.4 L | 4.0 | 30 / 1 | Yes |
| AXIOM-15-3 | 38700.6004 | 120 | 12.5 | 1150 | 1500 | 4.5 gal/17.1 L | 4/.113 | 31 / 14.1 | Yes |
| AXIOM-35-3 | 38700.6003 | 120/240 | 17.5 | 3500 | 3850 | 7.5 gal/28.4 L | 4/.113 | 31 / 14.1 | No |
| AXIOM-DV-3 | 38700.6009 | 120 | 12.5 | 1150 | 1500 | 3.8 gal/14.4 L | 6.4 | 32 / 1 | Yes |
| | | 120/208 | 13.9 | 2290 | 2640 | 6.7 gal/25.4 L | 6.4 | 32 / 1 | Yes |
| | | 120/240 | 15.7 | 3060 | 3410 | 7.5 gal/28.4 L | 6.4 | 32 / 1 | Yes |
| AXIOMP-DV-3* | 38700.6023 | 120 | 12.5 | 1150 | 1500 | 3.8 gal/14.4 L | 6.4 | 32 / 1 | Yes |
| | | 120/208 | 13.9 | 2290 | 2640 | 6.7 gal/25.4 L | 6.4 | 32 / 1 | Yes |
| | | 120/240 | 15.7 | 3060 | 3410 | 7.5 gal/28.4 L | 6.4 | 32 / 1 | Yes |

* Model includes Pourover feature

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: 120 volt, 15 amp. models require 2-wires plus ground service rated 120V, single phase, 60 Hz. If wired for 120/208V or 120/240V, required 3 wires plus ground service rated 120/208V or 120/240V, single phase, 60Hz. An internal terminal block is configured for connection to a 3-wire plus ground.
 Plumbing: 20-90 psi (138-621 kPa). Machines supplied with 1/4" male flare fitting.

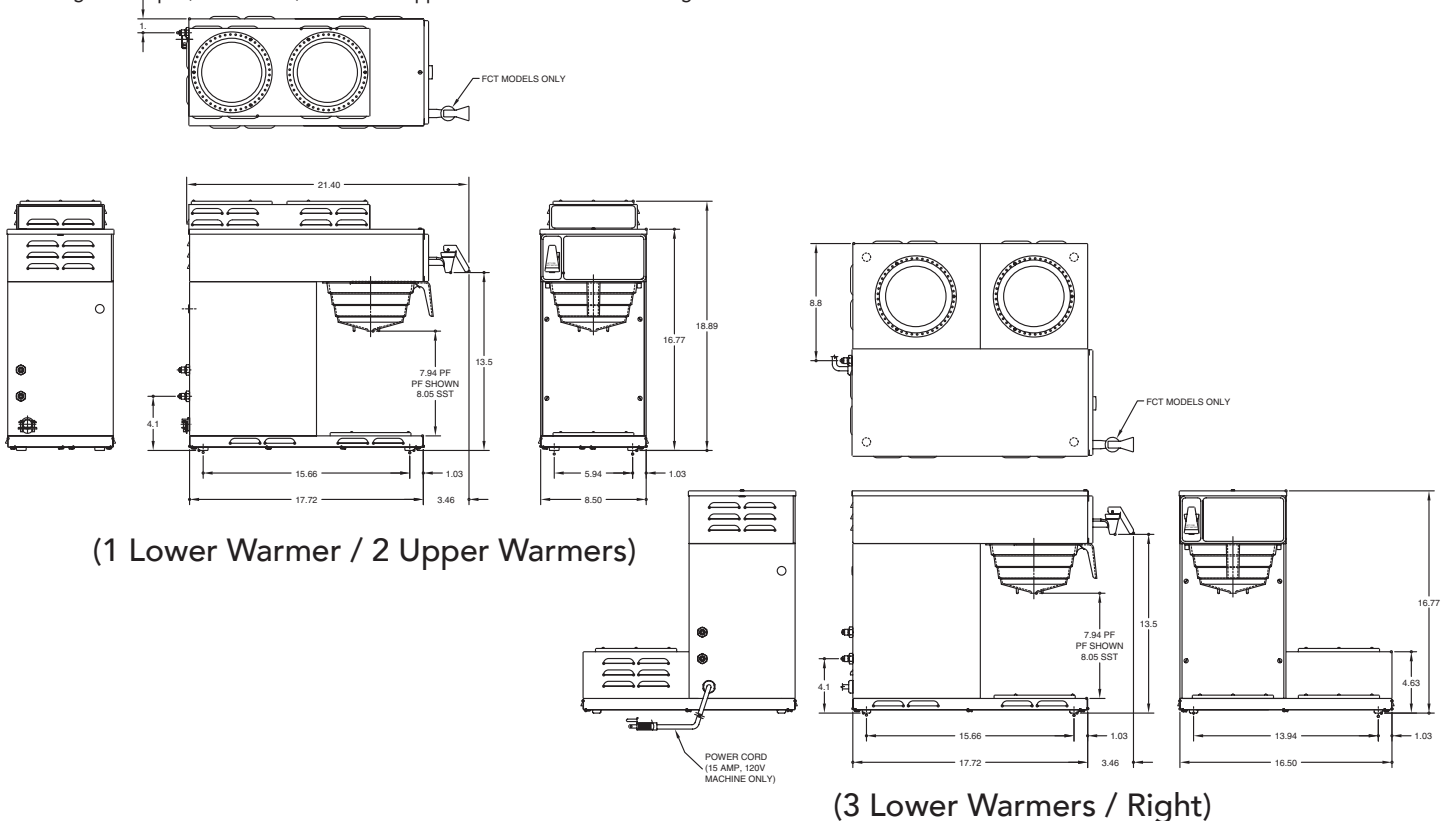

Bunn-O-Matic® Corporation of Canada • 280 Industrial Pkwy South, Aurora Ontario. L4G 3T9 • (905) 841-2866 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.