

AXIOM™ 12 Cup Automatic Coffee Brewer with 6 Warmers



Model AXIOM 4/2 Twin

(decanters sold separately)

Dimensions: 19.1" H x 16.4" W x 17.7" D
(48.5cm H x 41.7cm W x 44.9cm D)

Features

AXIOM Automatic Coffee Brewer

- Twin brew head system.
- Brews 15 gallons (56.8 litres) of perfect coffee per hour.
- Six individually controlled warming stations.
- For high lime areas, BrewLOGIC™ technology calculates flow rate and adjusts brew time to maintain consistent pot levels.
- BrewWIZARD™ technology incorporates simplified programming with a LCD display.
- Ensures coffee brew quality with cold brew lock out capability.
- All stainless steel construction.
- Includes hot water faucet.
- SplashGard® funnel deflects hot liquids away from the hand.
- Digital temperature control and accuracy.
- Pot level, cold brew lock-out and tank temperature set easily from advanced touch pad on front of machine.
- Electronic diagnostics and built in tank drain make service easier.
- Coffee extraction controlled with programmable pre-infusion or pulse brew.
- Energy-saver mode reduces tank temperature during idle periods.

Related Products

Easy Clear® EQ-17-TL

Product No. : 30200.1000



Easy Clear® ED-17-TL

Product No. : 30201.1001

Paper Filter Pack

Product No. : 20115.6000

Packed per case: 1,000

Dimensions: 4 1/4" Base x 2 3/4" Sidewall

10.8 cm Base x 6.98 cm Sidewall



Easy Pour® black decanter

Product No. : 06100.0201

Quantity: 1 (also packaged in quantities of 3 & 24)



Easy Pour® orange decanter (decaf)

Product No. : 06101.0201

Quantity: 1 (also packaged in quantities of 3 & 24)



WX1-warmer

Product No. : 06450.6000

One position warmer



WX2-warmer

Product No. : 06310.6000

Two position warmer



Model

AXIOM 4/2 Twin

Agency Listing



Dimensions & Specifications




Model	Product #	Volts	Amps	Tank Htr Watts	Total Watts	Capacity per hour	Cubic ft ³ /m ³	Weight lbs/kg	Cord Attached
AXIOM 4/2 Twin	38700.6014	120/208-240	27.9	2 @ 3000	6700	15 gal/56.9 liter	6.4/181	61/27.7	No

Brewing capacity: based upon incoming water temp of 60°F (140°F rise) per 1/2 gallon brew time of 4 minutes.

Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: Model requires 3-wires plus ground service rated 120/240, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machines supplied with 1/4" male flare fitting.

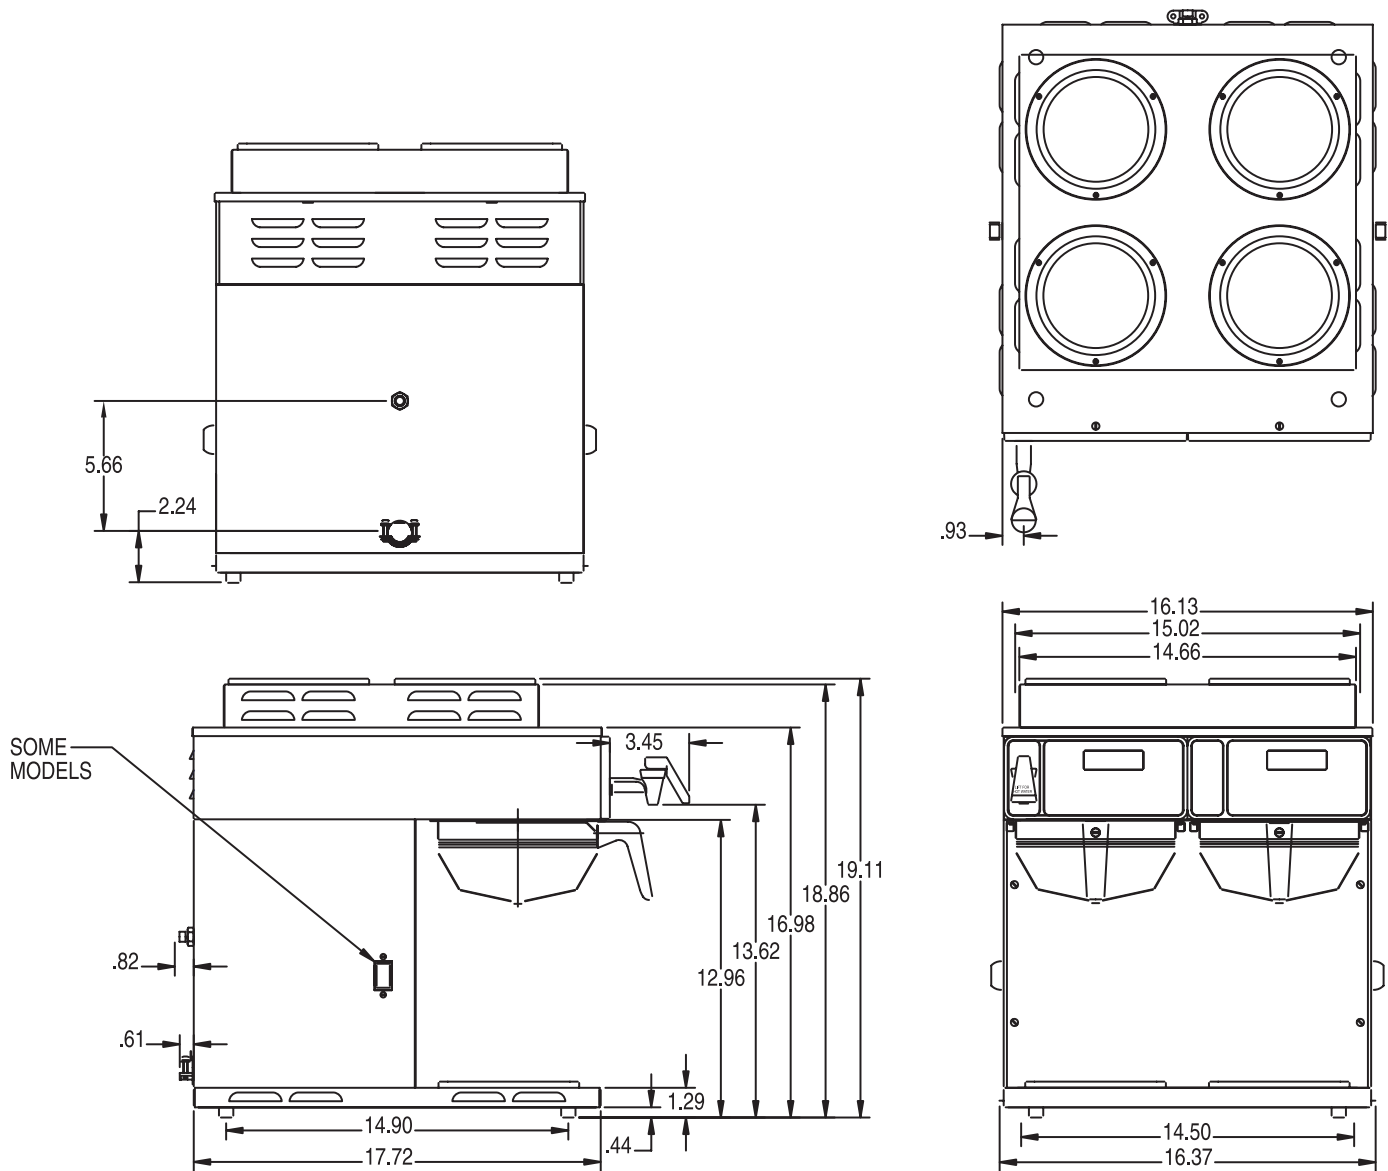

Bunn-O-Matic® Corporation of Canada • 280 Industrial Pkwy South, Aurora Ontario. L4G 3T9 • (905) 841-2866 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters.