



HIGH TEMPERATURE LOW TEMPERATURE CONVEYOR DISHMACHINE


EST-66

High Temperature-Low Temperature
66" Conveyor Dishmachine



Available as Left or Right.
(Must Specify)

CMA MODEL: EST-66



Corner Feed Table
Left or Right: must specify
Factory Installed Only



Vent Hoods 4" x 16"
with Damper Control (2 per set)



Sheet Pan Rack



E-Temp
CMA Booster Heater (40° and 70° rise)
Only available in 3 phase with 70° rise
Standard voltage 208-230V three phase
Factory Installed Only

FEATURES

- Automatic water control system.
- 249 racks / 996 covers per hour.
- Economical to operate. Uses only .46 gallons of water per rack of dishes.
- Single control switch activation.
- Power rinse heater system.
- Unique 4-stage washing process provides 2 wash stations, power heated rinse and final rinse all in a 66" machine.
- Automatic soil purging system filters wash water and traps plate debris into an external tray. Tray can be easily removed for cleaning.
- All stainless steel construction offers durable performance and years of trouble-free operation.
- Chemical resistant industrial heaters are proven to be more durable than commercial grade heaters.
- Large 19" opening accommodates larger items and utensils.
- Auto start/stop makes operation more energy efficient.
- Easy to remove and replace curtains for cleaning.
- Includes table limit switch and rack saver clutch system that protects the machine, dishracks and table from damage.
- 316 grade stainless steel chemical injection chamber.
- Includes 2 racks.

AVAILABLE OPTIONS

- Stainless Steel dishtables
- Drain Water Tempering Kit
- Scrap Trap Single Drain Connection Kit
- 208V-240V / 480V
- Exhaust Fan Control
- 6" Taller Model Available (EXT)


Note: Some US States may require Energy Star ratings for Commercial Dishwashers. The specifier or installer is responsible for knowing their local codes, standards, and regulatory requirements. This product was certified and met the requirements of previous Energy Star Version 2.0 for commercial dishwashers as required by some states.

**CMA
MIZER®**
Registered Trademark



**EST-66**High Temperature
Low Temperature
66" Conveyor Dishwasher**WARNINGS:**

- Electrical and Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Electrical, Plumbing and Safety codes.
- CMA recommends utilizing a water softening system to maintain water hardness measurements of 3.5 gpg (grains per gallon) or less. This will assure maximum results and optimum operation of the dishmachine.

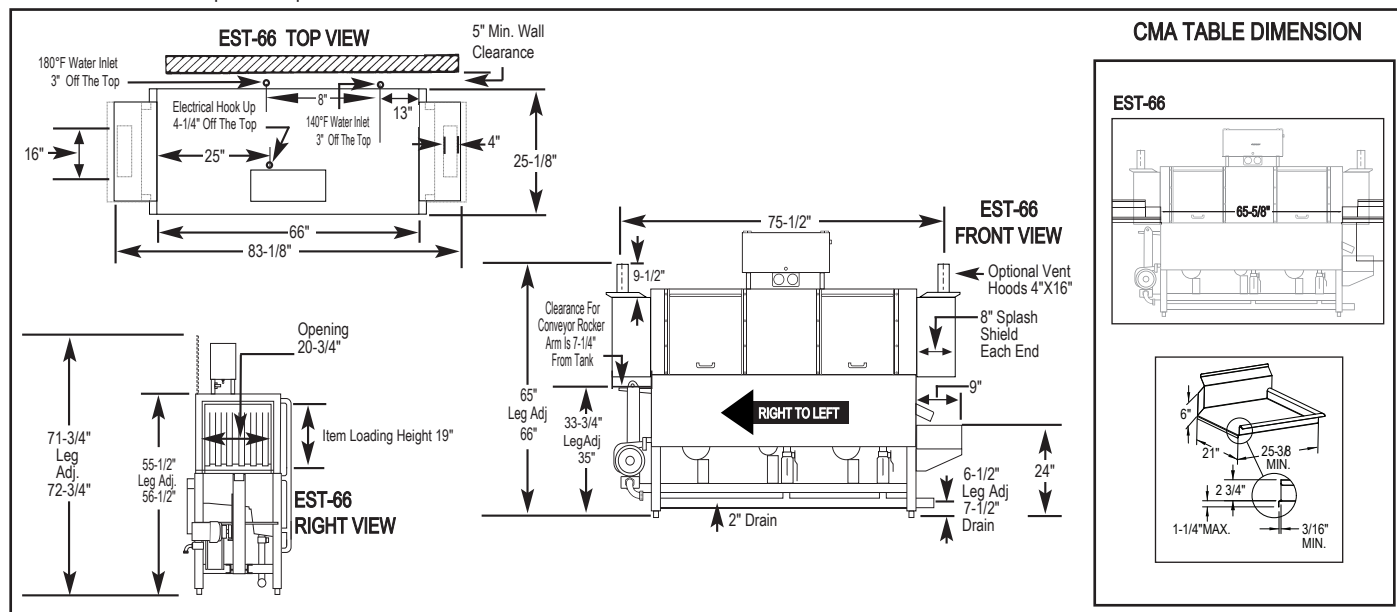**Specifications:**

MODEL EST-66 H/L			USA	METRIC	USA			METRIC
OPERATING CAPACITY RACKS PER HOUR (NSF RATED)243			249	249	DIMENSIONS			
CONVEYOR SPEED			6.75 FT./MIN.	(206 CM/MIN.)	DEPTH			25-1/8" (64cm)
WASH PUMP MOTORS HP			1	1	WIDTH			66" (167.64cm)
RINSE PUMP MOTOR HP			1/3	1/3	HEIGHT			55-1/2"-56-1/2" (142-143cm)
CONVEYOR MOTOR HP			1/8	1/8	STANDARD TABLE HEIGHT			34" (86cm)
WATER INLET - FILL			1/2"	(1.27cm)	MAX LOADING HEIGHT FOR WARES			19" (48cm)
WATER INLET - FINAL RINSE			1/2"	(1.27cm)	STANDARD DISHRACK DIMENSIONS			1 20" x 20" (50.8 X50.8cm)
DRAIN SIZE			2"	(5.1cm)	ELECTRICAL RATING			
FINAL RINSE PRESSURE			20 ± 5psi	(1.41 kg/cm²)	VOLTS			
WASH TANK CAPACITY EST-66					PHASE			
PRE-WASH			2.5 GAL	(9.5 L)	AMPS			
WASH			11.75 GAL	(44.5 L)	208			78
PRE-RINSE			4.25 GAL	(16 L)	240			87
TOTAL			18.5 GAL	(70.0 L)	208			58
WASH PUMP CAPACITY					240			66
EACH			52 GPM	(197 LPM)	480			26
OPERATING TEMPERATURE EST-66H					WASH TANK HEATER			13kW @ 208V (3 PHASE)
WASH			150°F-160°F	(66°C/71°C)	RINSE TANK HEATER			3kW @ 220V
PUMPED RINSE			160°F	(71°C)	SPECIFY DIRECTION OF RACK TRAVEL (RIGHT TO LEFT, LEFT TO RIGHT) WHEN ORDERING			
FINAL RINSE			180°F-195°F	(82°C/90°C)	EST-66H EXHAUST VENTILATION REQUIREMENTS AT 100% CAPACITY CFM			
OPERATING TEMPERATURE EST-66L					ENTRANCE END 200 MAX			DISCHARGE END 400 MAX TOTAL CFM 600 MAX
WASH RECOMMENDED			140°F-150°F	(60°C/68°C)	SHIPPING WEIGHT			
PUMPED RINSE RECOMMENDED			140°F-150°F	(60°C/68°C)	APPROXIMATE			750# (340kg)
FINAL RINSE RECOMMENDED			140°F-150°F	(60°C/68°C)				
WATER CONSUMPTION								
PER RACK (FINAL RINSE)			.46 GAL	(1.7 L)				
PER HOUR (FINAL RINSE)			114.54 GPH	(433.6 LPH)				

Summary Specifications: Model EST-66 Conveyor

The Models EST-66H high temperature and EST-66L Chemical Sanitizing conveyor dishwashers meets ETL sanitation, UL, and CUL construction standards. The EST-66 performs three separate washing functions including a built-in power rinse, all in a 66" space. The EST-66 washes up to 249 racks per hour and uses a mini-mum .46 gallons of water per rack while achieving sparkling, clean, dry dishes. Constructed entirely of stainless steel.

Call For Available Models (800-854-6417) or See web-Site: www.cmadishmachines.com Advisory: CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.

CMA Dishmachines 17707 Valley View Ave; Cerritos, CA 90703 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.



© 09-2024 CMA, Inc.



OPTIONAL CMA E-TEMP™

Hot Water Assurance System
For Conveyor Style Dishwashers



PATENT PENDING

FEATURES:

- 208V / 240V, 480V, single and three phase configurations.
- Single element (40 degree) vs. dual element option (70 degree)
- Tank plug for single element option
- Separate 208 / 240V 3 phase power connection required (electrical connection point provided inside conveyor control panel)
- Pre-plumbed, wired, and secured to the dishmachine
- Non-pressurized system for safe operation
- 40 degree rise
 - 9kW @ 208V, 25 amps
 - 12kW @ 240V, 29 amps
 - 12kW @ 480V, 15 amps
- 70 degree rise
 - 15kW @ 208V, 42 amps
 - 20kW @ 240V, 48 amps
 - 18kW @ 480V, 22 amps
- Field convertible from 40 degree rise to 70 degree rise





**MODEL EST-44 WITH E-TEMP™ BOOSTER HEATER
ALSO AVAILABLE ON MODEL EST-66**



OPTIONAL CMA E-TEMP





Hot Water Assurance System
For Conveyor Style Dishwashers

WARNING: Electrical and Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Electrical, Plumbing and Safety codes.

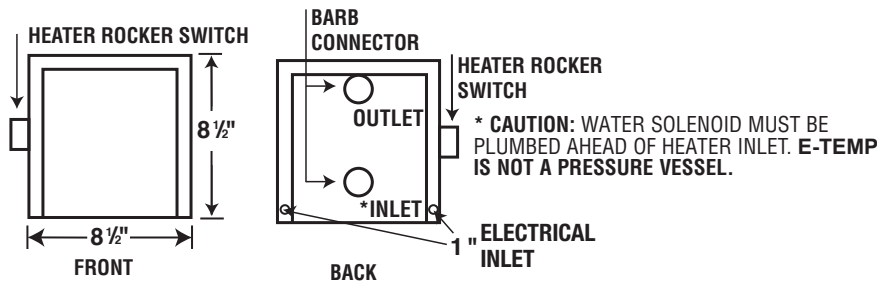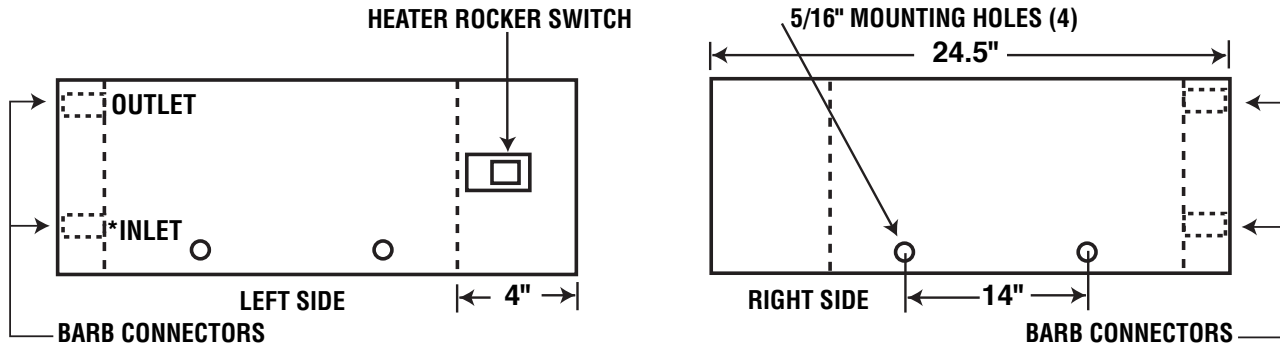

*** ONLY FOR 40° RISE**

**CHANGES FOR 1-PHASE
(TIE STRAPS CHANGED AS SHOWN)
ON HEATER**

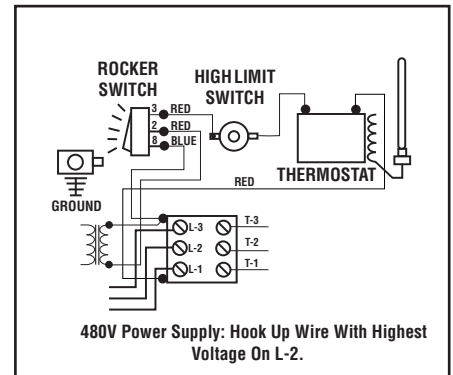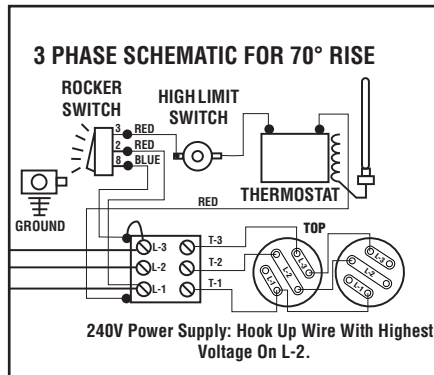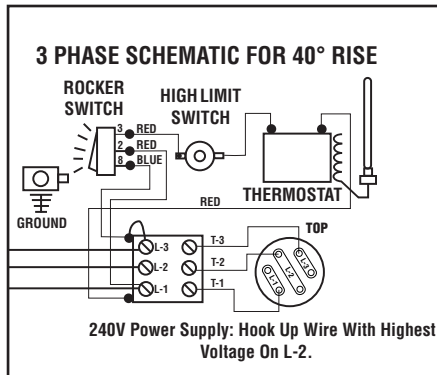

Specifications:

MODEL CMA E-TEMP	USA	METRIC
AVAILABLE HOT WATER	119 GPH	(450 LPH)
HEATER TANK CAPACITY	3.9 GAL	40
12kW @ 480V 40°F RISE BOOSTER HEATER (ONE HEATING ELEMENT)		
MIN. INCOMING WATER TEMP. RISE	140°F	(60°C)
	40°F	(22°C)
ELECTRICAL RATING	VOLTS	PHASE
	208	1
	240	1
	208	3
	240	3
	480	3
		AMPS
		43
		50
		25
		29
		15

2kW @ 480V, 70°F RISE BOOSTER HEATER (TWO HEATING ELEMENTS)			
MIN. INCOMING WATER TEMP.	110°F		(43° C)
TEMP RISE	70° F		(39° C)
ELECTRICAL RATING*	VOLTS	PHASE	AMPS
	208	3	42
	240	3	48
	480	3	22
*THE TWO ELEMENTS, 70°F RISE WILL BE AVAILABLE IN 3 PHASE ONLY.			