




HIGH TEMPERATURE UNDERCOUNTER DISHMACHINE

UC-50e

High Temperature
Undercounter Dishmachine



CMA MODEL: UC-50e

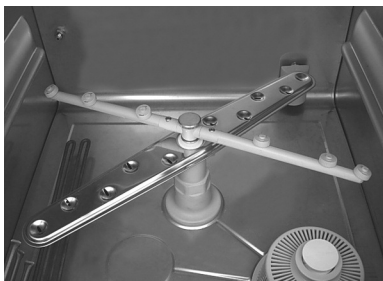

Upper and lower wash and
rinse arms guarantee
excellent results.



Built-in detergent and rinse
chemical pumps.

FEATURES

- 30 racks / 120 covers per hour.
- Large 13" maximum loading height door clearance accommodates oversized plates, glasses and utensils.
- Top mounted controls are easy to read and simple to operate.
- Fully automatic cycle for easy operation
- Pump drain allows for multiple installation applications including elevated drains.
- Safety Temp feature assures 180°F sanitizing rinse every cycle.
- Built-in 6 kW booster heater
- 2.7 kW wash tank heater.
- Double skin stainless steel provides consistent heating and a quiet operation.
- Low 0.8 US gal. water usage per rack.
- Door and water level safety switches, plus booster safety thermostat.
- Stainless steel safety filters protect wash pump.
- Polished stainless steel surface and tanks with rounded corners for a total and easy cleaning.
- Operator friendly, removable wash and rinse arms allows for easy cleaning.
- Triple filtering protection system, captures excess soil and debris.

AVAILABLE OPTIONS

- Water Tempering Kit
- Drain Board


Note: Some US States may require Energy Star ratings for Commercial Dishwashers. The specifier or installer is responsible for knowing their local codes, standards, and regulatory requirements. This product was certified and met the requirements of previous Energy Star Version 2.0 for commercial dishwashers as required by some states.

**CMA
MIZER®**
Registered Trademark



**UC50e**High Temp Undercounter
Dishwasher And Glasswasher**WARNINGS:**

- Electrical and Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Electrical, Plumbing and Safety codes.
- CMA recommends utilizing a water softening system to maintain water hardness measurements of 3.5 gpg (grains per gallon) or less. This will assure maximum results and optimum operation of the dishmachine.

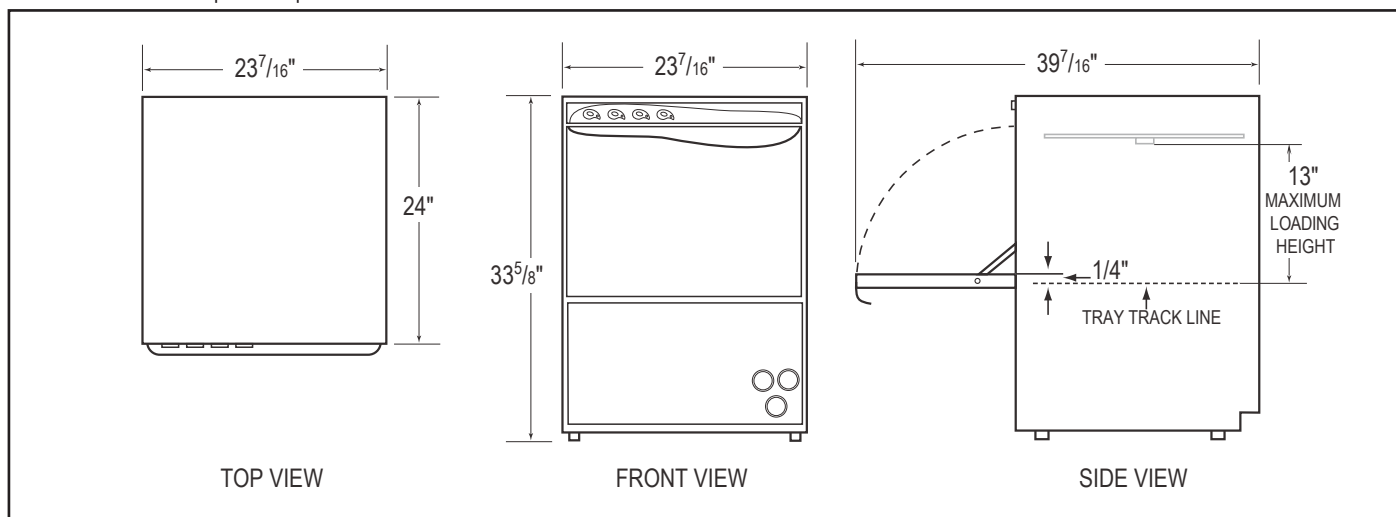**Specifications:**

MODEL UC50e	USA	METRIC		USA	METRIC	
WATER CONSUMPTION			FRAME DIMENSIONS			
PER RACK	.8 GAL	(3L)		DEPTH	24"	(61 CM)
PER HOUR	24/16 GAL	(90/60L)		WIDTH	23-7/16"	(59.5 CM)
				HEIGHT	33-5/16"	(84.5 CM)
OPERATING CYCLE			MAXIMUM LOADING HEIGHT	13"	(33 CM)	
WASH TIME-SEC	100/160	100/160				
RINSE TIME-SEC	15/15	15/15				
DWELL-SEC	5/5	5/5				
TOTAL CYCLE-SEC	120/180	120/180				
OPERATING CAPACITY						
RACKS PER HOUR	30/20	30/20				
WASH TANK CAPCITY	6.87 GAL	(26L)				
WATER REQUIREMENTS						
WATER INLET	140°F	(60°C)				
DRAIN CONNECTION	3/4"					
RINSE PRESSURE SET	1"					
CYCLE TEMPERATURES						
WASH-°F	155°F-160°F	(68°C/71°C)				
RINSE-°F	180°F-195°F	(82°C/90°C)				

Summary Specifications: UC-50e

The UC50e dishwasher and glasswasher is a front loading machine designed to produce sparkling clean glasses and dishes. Constructed of double walled stainless steel skin providing constant heating and a quiet operation. Standard features include upper and lower wash/rinse arms and wash and booster tank heater. Features include 13" maximum loading height, standard liquid detergent rinse-aid dispenser.

KROMO BRANDS

Distributed exclusively by CMA Dishmachines

Advisory: CMA does NOT endorse "Tankless On-Demand" water heaters for use on CMA Dishmachine products. CMA DOES endorse, and highly recommends, the standard "tank" style water heaters, sized properly to handle each particular facility with their water heating requirements.

CMA
MIZER®
Registered TrademarkCMA Dishmachines 17707 Valley View Ave; Cerritos, CA 90703 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

© 09-2024 CMA, Inc.

