

# FISHER<sup>®</sup>

FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238  
customer@fisherfaucets.com - www.fisherfaucets.com

PRODUCT NAME:

PRERINSE SPG 8BSCDLH EZ SS

Customer/Wholesaler:

Date:

Job Name:




Model Specified:

Quantity:

Contractor:

Architect/Engineer:

| MODEL | DESCRIPTION                  | DIM A          | DIM B               | DIM C                |
|-------|------------------------------|----------------|---------------------|----------------------|
| 48880 | PRERINSE SPG 8BSCDLH EZ 06SS | 6"<br>[152mm]  | 7 3/8"<br>[188mm]   | 11 1/8"<br>[282mm]   |
| 48910 | PRERINSE SPG 8BSCDLH EZ 12SS | 12"<br>[305mm] | 9"<br>[229mm]       | 12 11/16"<br>[322mm] |
| 48920 | PRERINSE SPG 8BSCDLH EZ 14SS | 14"<br>[356mm] | 9 11/16"<br>[245mm] | 13 3/8"<br>[339mm]   |
| 48930 | PRERINSE SPG 8BSCDLH EZ 16SS | 16"<br>[406mm] | 10 5/16"<br>[262mm] | 14"<br>[356mm]       |

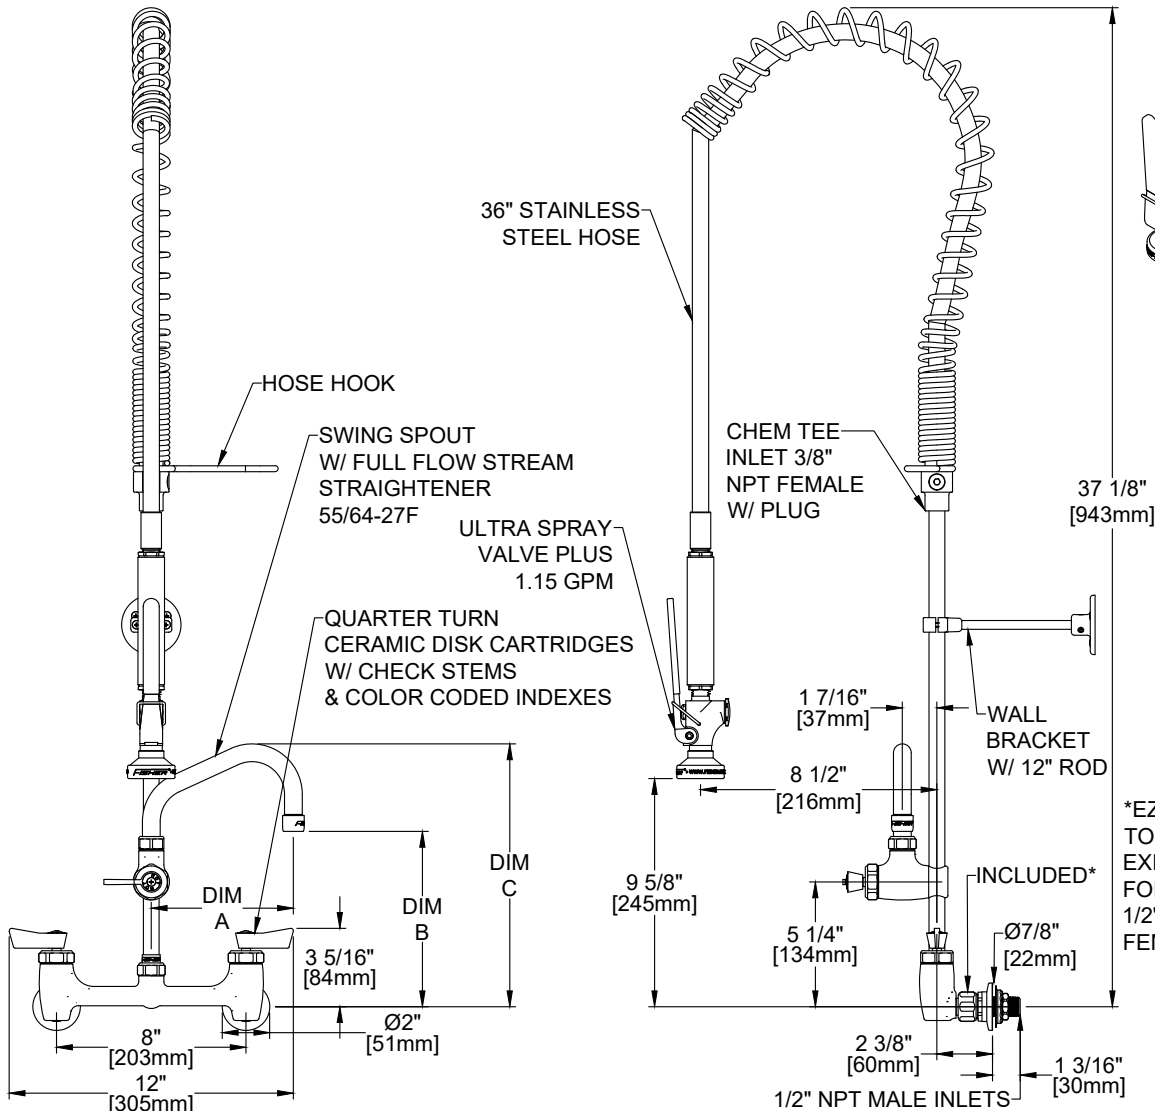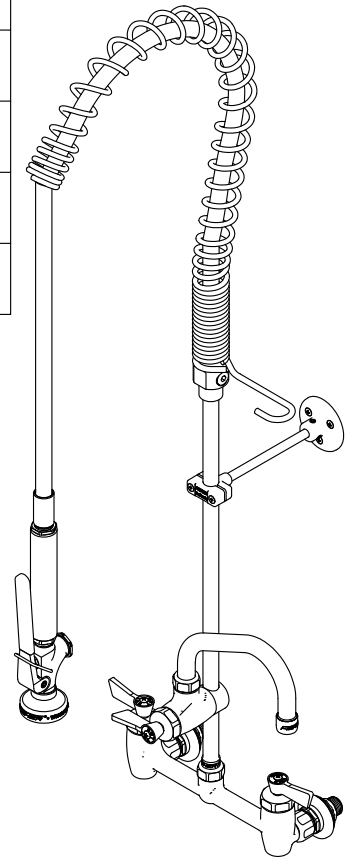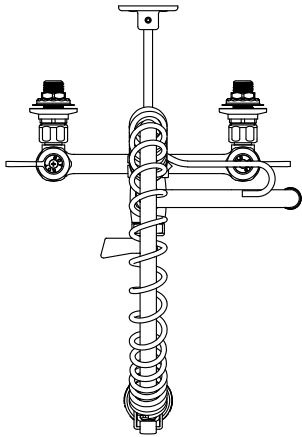

PRODUCT SPECIFICATIONS: PRE-RINSE, 8" BACKSPASH CONTROL VALVE, QUARTER TURN CERAMIC DISK CARTRIDGES W/ CHECK STEMS, LEVER HANDLES, SWING SPOUT W/ FULL FLOW STREAM STRAIGHTENER 12.5 GPM @ 60 PSI, 36" STAINLESS STEEL HOSE, 1.15 GPM @ 60 PSI SPRAY VALVE, 12" WALL BRACKET, 1/2" NPT MALE INLETS, INCLUDES EZ INSTALL ADAPTERS

PRODUCT COMPLIANCE:  
ASME A112.18.1 / CSA B125.1  
NSF 61 - Section 9  
NSF 372 (Low Lead Content)  
2019 DOE PRSV - Class II

Drawn: LC

Checked: EM

Approved: LC


Date: 12/23/24

Sheet: 1 of 2

SPEC. PRCB-SPA-8BSZLL

|                      |                     |           |                  |           |
|----------------------|---------------------|-----------|------------------|-----------|
| Customer/Wholesaler: | Date:               | Job Name: | Model Specified: | Quantity: |
| Contractor:          | Architect/Engineer: |           |                  |           |

## REPLACEMENT PARTS

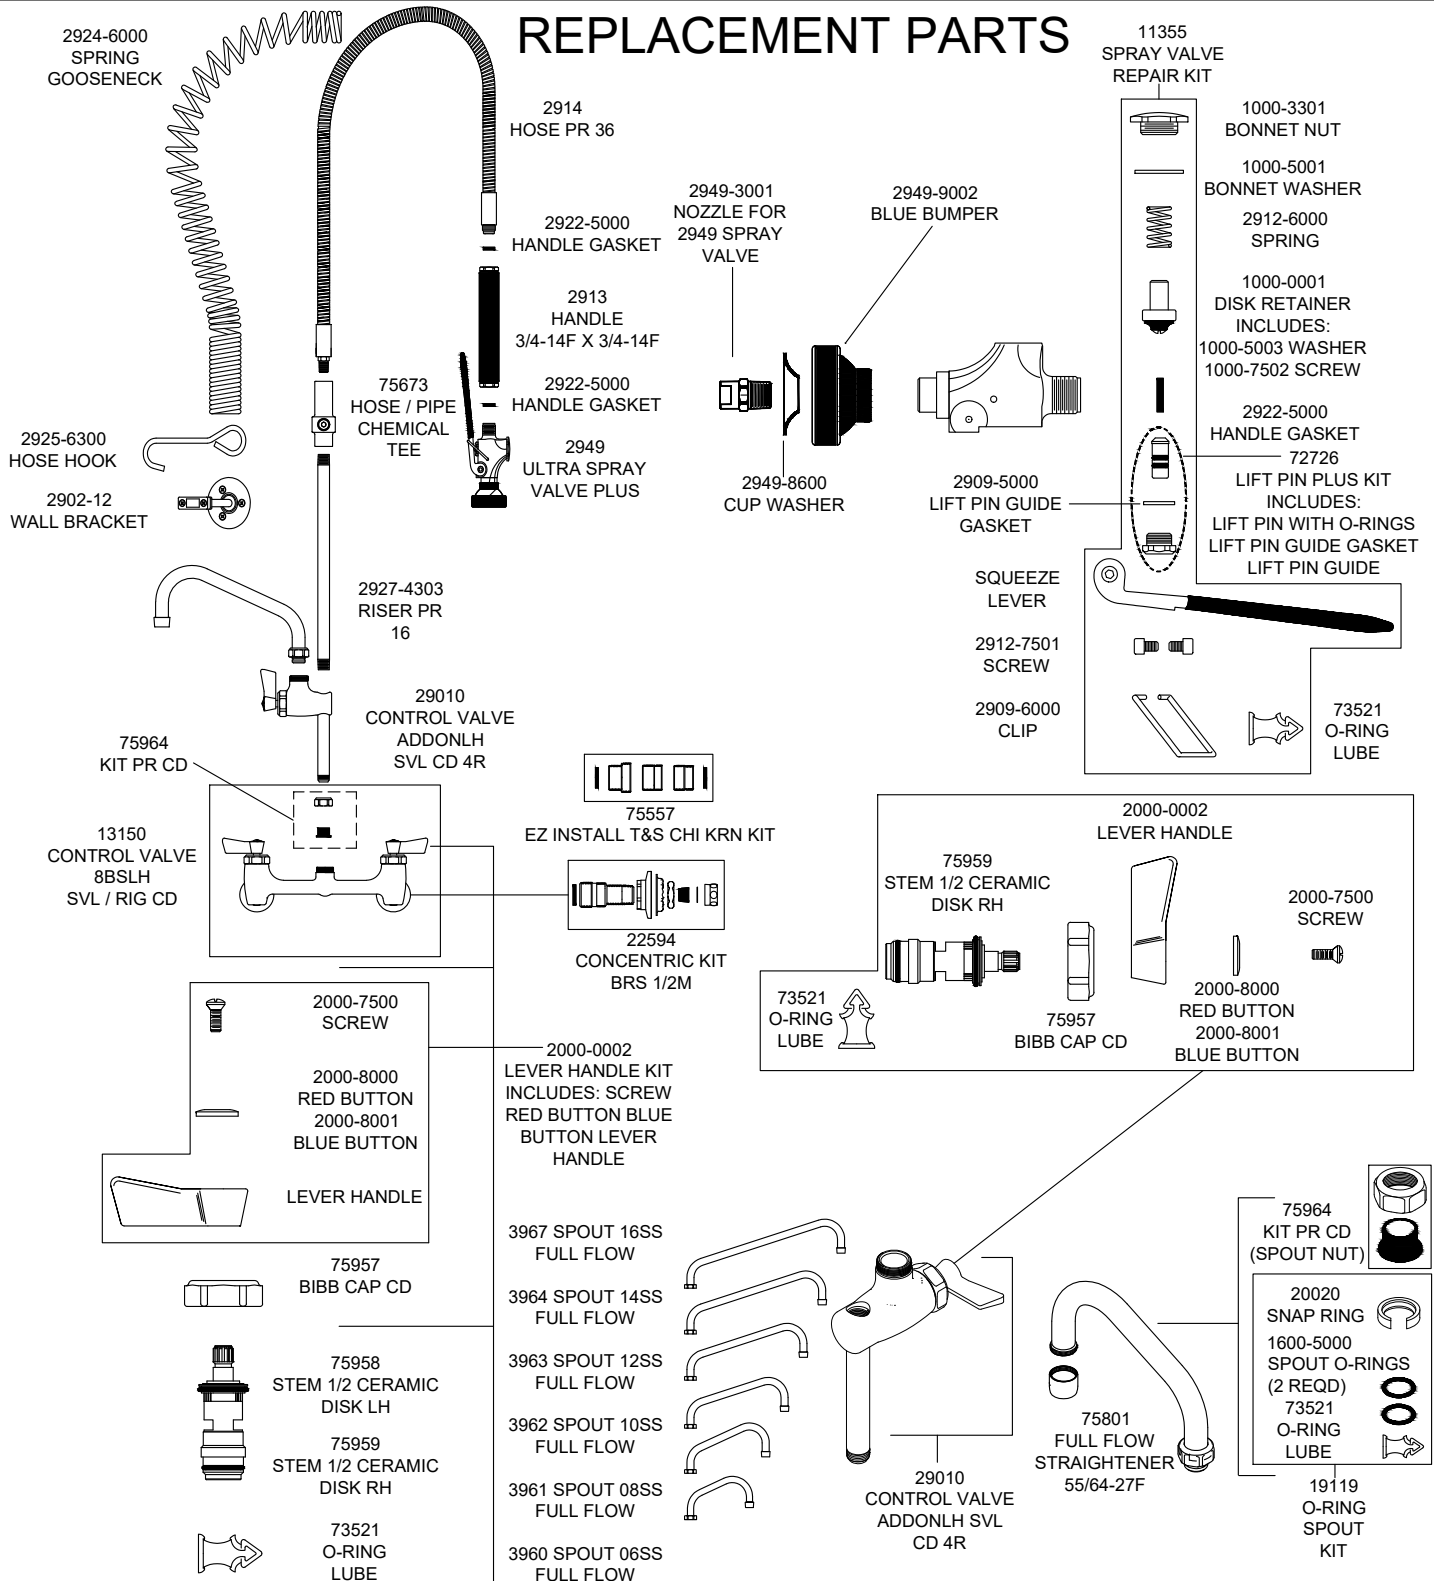

PRODUCT SPECIFICATIONS: PRE-RINSE, 8" BACKSPASH CONTROL VALVE, QUARTER TURN CERAMIC DISK CARTRIDGES W/ CHECK STEMS, LEVER HANDLES, SWING SPOUT W/ FULL FLOW STREAM STRAIGHTENER 12.5 GPM @ 60 PSI, 36" STAINLESS STEEL HOSE, 1.15 GPM @ 60 PSI SPRAY VALVE, 12" WALL BRACKET, 1/2" NPT MALE INLETS, INCLUDES EZ INSTALL ADAPTERS

PRODUCT COMPLIANCE: ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) 2019 DOE PRSV - Class II