HABCO

BUILT TO PERFORM. CRAFTED TO LAST.®

SF10HCBXM

Froze Space Merchandiser ®

Project Name: _____

Item #: _____ Quantity: _____



Width*	Depth**	Height***	Shelves	Ship Weight	Ship Cube	Cooling Capacity	Electrical
23 7/8" 607 mm	31" 788 mm	54" 1372 mm	3	230 lbs 104 kg	25 cu. ft 0.71 m^3	1/2 HP	115V/5.7 Amp/60 Hz - Single Phase - NEMA 5-15P, Dedicated Circuit

** Add 1" (26mm) for Power Cord. *** Add 3/8" (10mm) for Threaded-In Levelers. Millimeters rounded up.

Custom Graphics Optional.

Premium Features

- ProductTemp™
- Digitally Controlled
- Finless Free&Clear™ Condenser Coil
- Variable Speed Compressor
- LED Lighting System
- Automatic Stainless Steel Condensate Control System
- Priority Air-Flow

Specifications subject to change without notice. Refer to website for most current information.

HABCO

BUILT TO PERFORM. CRAFTED TO LAST.®

SF10HCBXM: Designed to optimize merchandising experience to the highest standards of quality and performance.

Refrigeration:

• Advanced variable speed compressor for extended operational life and improved energy efficiency.
• Split forced-air refrigeration system employs R290 refrigerant within a sealed capillary tube system.
• Condensing unit is bottom-mounted and can be accessed from the front for ease of maintenance.
• Priority, directed air flow provides optimum cooling and energy efficiency through front of unit for optimized heat exchange ventilation.
• Finless, Free&Clear Condenser Coil maximizes air-flow over compressor, reduces energy consumption and is non-clogging.
• Corrosion resistant coated evaporator coil.
• Automatic, stainless steel condensate control system.
• Equipped with Energy Efficient Digital Controller featuring visual/audible product protection alarm. Freezers factory preset for -23.3°C (-10°F) .
• Technologically advanced ProducTemp™ provides exterior product temperature display. Displays to a resolution within 1°.
• Energy-Saving, Time-Initiated, Temperature-Terminated Defrost System with Evaporator Fan Motor Delay during Defrost and Fan Motor Interrupt on Door Opening. Features Manual Defrost Override.
• Quality, self lubricating and sealed motors with streamlined air-flow provide quieter yet robust refrigeration.
• Equipped with Digital Thermometer

Cabinet:

• Exterior – durable textured black
• Interior – NSF approved white aluminum liner with stainless steel floor.
• Ergonomic raised interior floor.
• Insulation – cabinet is foamed-in-place with eco-conscious, polyurethane insulation.
• Heavy duty thread-in leveler legs

Doors:

• Self-Closing Swing Doors feature hold-open position, and spring-back protection.
• Magnetic gaskets are single piece bead-mount construction easily removable for cleaning.
• Low energy, anti-fog film coated and insulated safety glass with black extruded frame.
• Integrated, injection molded pocket handle(s).

Lighting:

• Energy efficient LED lighting system for sparkling illuminated interior display, on switch.

Storage:


• Three (3) white coated shelves 18 1/2"W x 22 3/4"D (470mm x 578mm) are NSF approved.
• Heavy duty aluminum shelving pilasters will not peel or chip adjustment of 1/2" (13mm) increments
• NSF-7 compliant for storage or display if pre-packaged aseptic product.


Electrical:

• Factory power cord installed for connection to a sole-use (dedicated) 115V/60Hz/1-Phase, 15 Amp circuit



115/60/1
NEMA 5-15R

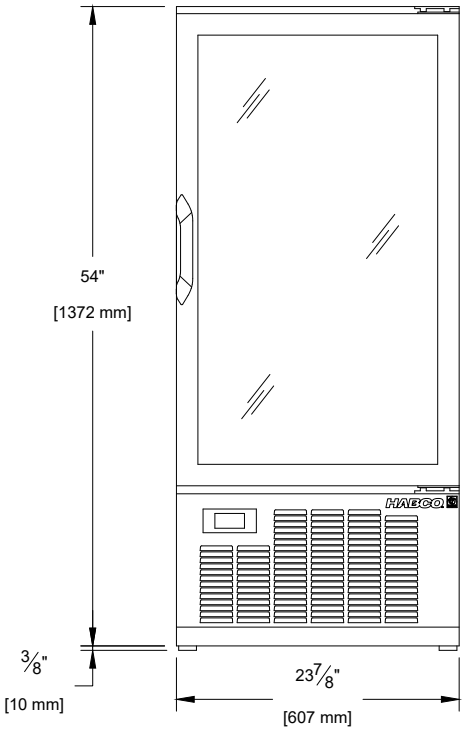

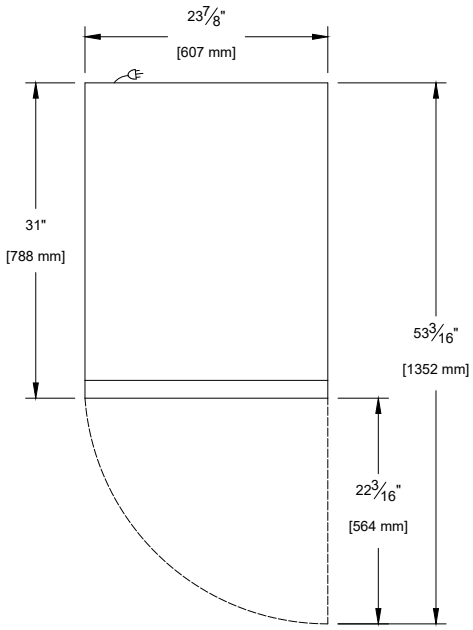

HABCO MANUFACTURING INC. 501 GORDON BAKER ROAD, TORONTO, ONTARIO, CANADA, M2H 2S6
Toll Free CAN: 1-800-387-5398 USA: 1-800-448-0244 Fax: 416-491-6982 www.habcomfg.com

©2017 HABCO Manufacturing Inc. HABCO is a registered trade mark of HABCO Manufacturing Inc. in Canada, USA, U.K. and Germany. HABCO logo design, Built to Perform. Crafted to Last. and CASSETTE are registered trademark of HABCO Manufacturing Inc. in Canada and U.S.A. Additional trade marks may be employed by HABCO and have been duly noted with respective registration mark or trade mark symbol. DOMESTIC AND INTERNATIONAL PATENTS.