HABCO®

BUILT TO PERFORM. CRAFTED TO LAST.®

# SF46HCSA

*Double Solid Door Freezer*



## Specifications

| Width* | Depth** | Height*** | Shelves | Interior Cubic Volume | Ship Weight | Ship Cube | Cooling Capacity | Electrical |
|---|---|---|---|---|---|---|---|---|
| 47 1/2" 1207 mm | 31" 788 mm | 78" 1982 mm | 6 | 38.2ft³ (1.08m³) | 480 lbs. 217.72 kg. | 83.28 cu. ft. 2.36 m³ | 1 HP | 115V7.3 Amp/60 Hz - Single Phase - NEMA 5-15P, Dedicated Circuit |

*Add 1" (26 mm) for casters. **Add 1" (26 mm) for power cord + 0.125" (3 mm) for door handle. ***Add 121 mm or 4.75" for casters.

## Premium Features

- Automatic Stainless Steel Condensate Control System
- Free & Clear Condenser Coil
- HABCO Insulated Glass
- LED
- ProductTemp™
- Variable speed
- Digitally Controlled
- Priority Air-Flow

**DOUBLE SOLID DOOR FREEZER**

Specifications subject to change without notice. Refer to website for most current information.

HABCO

BUILT TO PERFORM. CRAFTED TO LAST.®

# SF46HCSA: Designed to enhance the refrigerated storage or display experience to the highest standards of quality and performance.

## Refrigeration:

- Advanced variable speed compressor for extended operational life and improved energy efficiency.
- Split forced-air refrigeration system employs R290 refrigerant within a sealed capillary tube system.
- Condensing unit is bottom-mounted and can be accessed from the front for ease of maintenance.
- Priority, directed air flow provides optimum cooling and energy efficiency through front of unit for optimized heat exchanger ventilation.
- Finless, Free&Clear Condenser Coil maximizes air-flow over compressor, reduces energy consumption and is non-clogging.
- Corrosion resistant coated evaporator coil.
- Automatic, stainless steel condensate control system.
- Equipped with Energy Efficient Digital Controller featuring visual/audible product protection alarm. Freezers factory preset for -23.3°C (-10°F).
- Technologically advanced ProductTemp™ provides exterior product temperature display. Displays to a resolution within 1°.
- Energy-Saving, Time-Initiated, Temperature-Terminated Defrost System with Evaporator Fan Motor Delay during Defrost and Fan Motor Interrupt on Door Opening. Features Manual Defrost Override.
- Peak performance with EC motors designed for energy savings and superior performance.
- Equipped with Digital Thermometer.

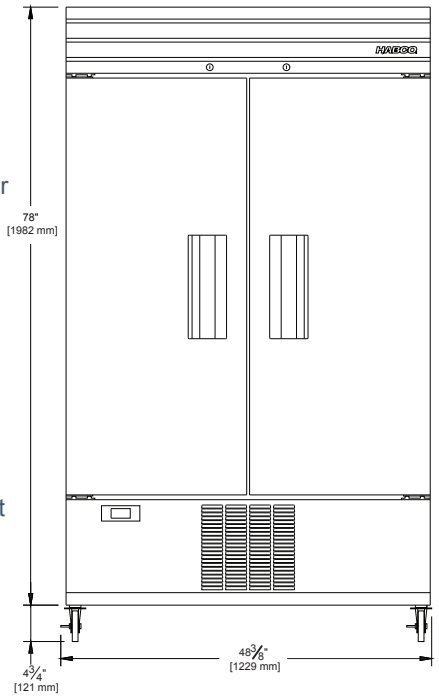


## Cabinet:

- Exterior – stainless steel front and sides.
- Stainless Steel Interior with coved corners stands up to rigours of everyday wear and tear.
- Ergonomic raised interior floor.
- Insulation – cabinet and solid doors are foamed-in-place with eco-conscious, polyurethane insulation.
- 5” Swivel Caster Kit Included.

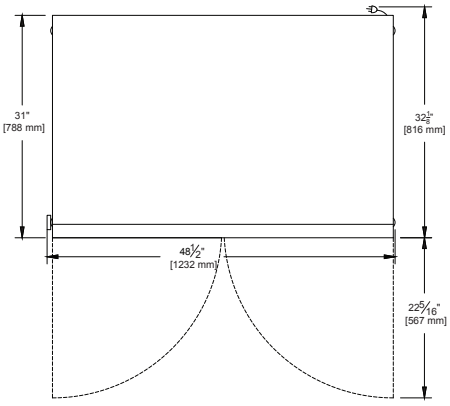


## Doors:

- Self-Closing Swing Doors feature hold-open position, and spring-back protection.
- Magnetic gaskets are single piece bead-mount construction easily removable for cleaning.
- Stainless steel front with white aluminum interior liner and large grip, recessed handle(s).

## Lighting:

- Energy efficient LED lighting system for sparkling Illuminated Interior Display, on Switch.

## Storage:

- Six (6) white coated shelves 19 1/2"W x 20 1/2"D (495mm x 521mm) are NSF approved.
- Heavy duty aluminum shelving pilasters will not peel or chip adjustment of 1/2" (13mm) increments.

## Electrical:

- Factory power cord installed for connection to a sole-use (dedicated) 115V/60Hz/1-Phase, 15 Amp circuit.




c UL us LISTED

NSF

CERTIFIED

NATURAL

**HABCO MANUFACTURING INC. 501 GORDON BAKER ROAD, TORONTO, ONTARIO, CANADA, M2H 2S6**
**Toll Free CAN:1-800-387-5398USA:1-800-448-0244 Fax:416-491-6982 www.habcomfg.com**

©2017 HABCO Manufacturing Inc. HABCO is a registered trade mark of HABCO Manufacturing Inc. in Canada, USA, U.K. and Germany. HABCO logo design, Built to Perform. Crafted to Last. and CASSETTE are registered trademark of HABCO Manufacturing Inc. in Canada and U.S.A. Additional trade marks may be employed by HABCO and have been duly noted with respective registration mark or trade mark symbol. DOMESTIC AND INTERNATIONAL PATENTS.