





Advanced Cooking Technology

- Convection, Broil & Microwave
- 6 Combination Modes
- Inverter Technology
- 1200 W Microwave Cooking Power

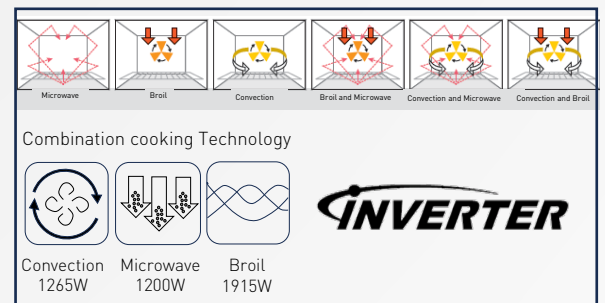


Functional Design

- Compact Footprint
- Stackable & Cool Touch Exterior
- Removable Air Filter, Drip and Oil Trays

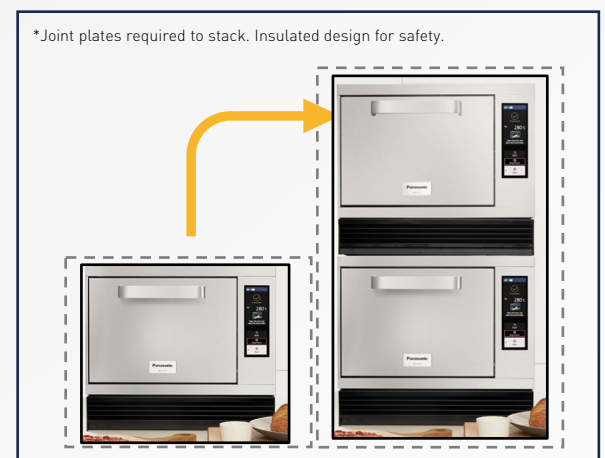

Flexible & Easy to Use

- LCD Touch Screen Display
- 17 Pre-Programmed Menu Options
- Customizable Menu Options (1000 Capacity)
- Easy to Setup & Maintain

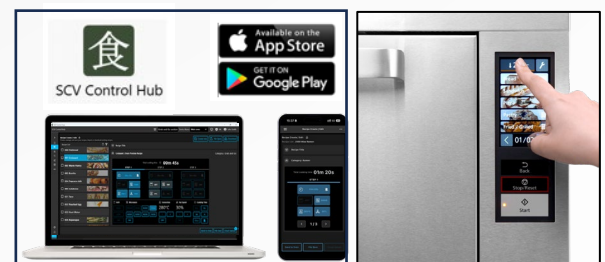

Model Info	Model Number	NE-SCV3N
	Oven Type	High-Speed
	Capacity	0.346cft (10L)
Cooking Power	Microwave	1200 W
	Convection	1265 W
	Grill (Broil)	1915 W
Cooking Technology	Panasonic Technology	Inverter
	Microwave (Energy Feed)	Bottom Energy Feed (2 Magnetrons)
	Microwave Cooking/Power Levels	Microwave: 8 Levels Broil: 2 levels (High / Low) Fan speed: 30-100%
	Stage Cooking	3 Stages
	Convection	Yes
	Broil	Yes
	Combination Cooking	Yes (6 Combo Modes)
	Memory Lock	Yes
	Multiple Quantity Keys	-
	Timer	-
	Automatic Programs	17
	Customizable Menu	1000 Cooking Menu Settings
Design	Face of Door	Stainless Steel
	Door Design	Drop down
	Cabinet Construction/Body	Stainless Steel
	Oven Interior	Stainless Steel
	Oven Light	LED Light
	Base Plate	Sealed-in ceramic
	Display/Control Panel	LCD Touch Screen (Color)
	Stackable	Yes (Up to 2 units)
	Cool Touch Cabinet	Yes
	Removable Air Filter	Yes
	Removable Drip Tray	Yes
	Removable Oil Tray	Yes
Accessories	Cooking Plate	Yes
	Paddle	Yes
	Operating Instructions	English/French/Spanish
Specifications	App & Software Support	SCV Control Hub for Desktop, iOS and Android app support
	Connectivity	USB Port
	Power Source	208/240V, 60Hz Single Phase
	Power Requirement	3750 W
	Current	208 V (19 A) / 240 V (17 A)
	Receptacle Requirement	20 A (NEMA #6-20R)
	Operating Frequency	2450 MHz
	Convection Temp Range	180-280 °C (350-525 °F)
	Preheat Temp Range	250-280 °C (475-525 °F) (Default) Can be changed between 350-525 °F (180-280 °C) in 25 °F increments
	Net Weight in kg (lbs.) (approx.)	39 kg (86 lbs.)
	Outer Dimensions H x W x D mm (Measurements in Inches)	412 x 474 x 565 mm (16-14/64" x 18-42/64" x 22-16/64")
	Cavity Dimensions H x W x D mm (Measurements in Inches)	110 x 270 x 330 mm (4-21/64" x 10-40/64" x 12-63/64")
	Safety Certification	cULus

