




WD-CSA SERIES

Tag: _____

Grease Interceptor

SPECIFICATION: Watts Drainage Products WD-CSA Series epoxy coated inside and outside fabricated steel grease interceptor with flow rating of 4 to 75 gpm and grease capacity of 8 to 150 lbs. Unit shall include one piece removable baffle assembly, code approved deep seal trap, secured and gasketed non slip cover, NH (MJ) (standard) inlet and outlet and external flow control.

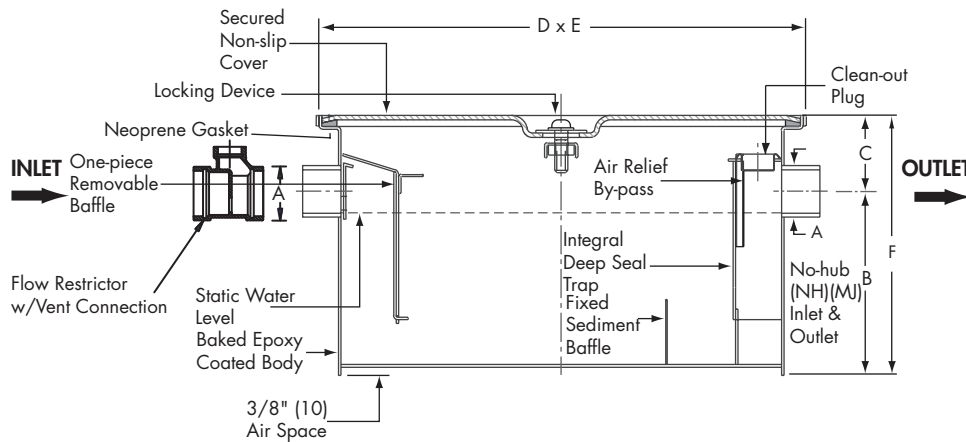

Flow Rate (Select One)		
Suffix	Description	
104	4 GPM	<input type="checkbox"/>
107	7 GPM	<input type="checkbox"/>
110	10 GPM	<input type="checkbox"/>
115	15 GPM	<input type="checkbox"/>
120	20 GPM	<input type="checkbox"/>
125	25 GPM	<input type="checkbox"/>
135	35 GPM	<input type="checkbox"/>
150	50 GPM	<input type="checkbox"/>
175	75 GPM	<input type="checkbox"/>

Options (Select One or More)		
Suffix	Description	
-B	Sediment Bucket	<input type="checkbox"/>
-DI	Dual Inlet	<input type="checkbox"/>
-E	Electronics	<input type="checkbox"/>
-F	Flange	<input type="checkbox"/>
-FC	Flange & Clamp Device	<input type="checkbox"/>
-HDC	Heavy Duty Cover 1,000 lbs.	<input type="checkbox"/>
-O	Inlet & Outlet Other Than Standard	<input type="checkbox"/>
-SS	Stainless Steel	<input type="checkbox"/>
-X#"	Extension as Required	<input type="checkbox"/>
-XHDC	Extra Heavy Duty Cover 10,000 lbs.	<input type="checkbox"/>
-IP	Injection Port	<input type="checkbox"/>
-ALC	Aluminum Cover	<input type="checkbox"/>
-FSB	Fish Scale Bucket	<input type="checkbox"/>

Interceptor Catalog Number	Grease Capacity lbs.	A	B	C	D	E	F
		Inlet & Outlet	Base to Center	Top to Center	Length	Width	Height
WD-104	8	2"(51)	7-3/4"(197)	6"(152)	16"(406)	10"(254)	13-3/4"(349)
WD-107	14	2"(51)	8-1/2"(216)	6"(152)	18"(457)	13"(330)	14-1/2"(368)
WD-110	20	2"(51)	8-1/2"(216)	6"(152)	21-3/4"(552)	14"(356)	14-1/2"(368)
WD-115	30	2"(51)	10-1/2"(267)	6"(152)	22"(559)	15"(381)	16-1/2"(419)
WD-120	40	3"(76)	11-1/2"(292)	6"(152)	24"(610)	15-3/4"(400)	17-1/2"(445)
WD-125	50	3"(76)	12"(305)	6"(152)	26"(660)	16-1/2"(419)	18"(457)
WD-135	70	4"(102)	14"(356)	6"(152)	30"(762)	18"(457)	20"(508)
WD-150	100	4"(102)	16"(406)	6"(152)	32"(813)	22"(559)	22"(559)
**WD-175	150	4"(102)	18-1/2"(470)	6"(152)	36"(914)	24"(610)	24-1/2"(622)

Optional Inlet/Outlet Sizes		
Suffix	Description	
-2	2"(51) Inlet/Outlet	<input type="checkbox"/>
-3	3"(76) Inlet/Outlet	<input type="checkbox"/>
-4	4"(102) Inlet/Outlet	<input type="checkbox"/>
-6	6"(152) Inlet/Outlet	<input type="checkbox"/>

NOTICE

**WD-175 not CSA certified, comes with internal flow control.

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Job Name _____
 Job Location _____
 Engineer _____

Contractor _____
 Contractor's P.O. No. _____
 Representative _____

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

USA: Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com
 Canada: Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca
 Latin America: Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com



A Watts Water Technologies Company