



CDL CHEMICAL SANITIZING Door-Type Dish Machine



SPECIFIER STATEMENT

Specified unit will be NSF rated, Centerline™ by Hobart chemical sanitizing door-type dishwasher. Features recirculating design, two selectable cycles, pumped drain, 18" door opening, .86 gallons per rack, LED temperature and operator display, service diagnostics, detergent, rinse aid and sanitizer pumps. Constructed of stainless steel, rated at 51 racks per hour. 120/60/1 standard voltage.

1 year parts and labor warranty.

Project _____

AIA # _____ SIS # _____

Item # _____ Quantity _____ C.S.I. Section 114000

MODEL

☐ **CDL** Chemical sanitizing

STANDARD FEATURES


- + 51 racks per hour
- + .86 gallons of water per rack
- + Chemical sanitizing
- + Recirculating design
- + Top-mounted user interface with digital temperature display
- + 4-sided door
- + 1 standard cycle with optional extended cycle
- + 18" pillarless door opening
- + Snap-in, revolving upper and lower anti-clogging wash & rinse arm; low-profile, single-arm design
- + Removable, 2-part stainless steel scrap screen
- + Soft start
- + Automatic pumped drain
- + Automatic fill
- + Service diagnostics with error notifications
- + Delime notification and cycle
- + Chemical pumps standard
- + Electric tank heat
- + Door actuated start
- + Straight through or corner installation

OPTIONS & ACCESSORIES (Available at extra cost)


- ☐ Chemical sensing indicators (low chemical alert)
- ☐ Corner splash kit
- ☐ Water hammer arrestor kit
- ☐ Pumped drain air gap kit
- ☐ Peg rack
- ☐ Combination rack
- ☐ Flanged feet

CDL CHEMICAL SANITIZING


Approved by _____ Date _____ Approved by _____ Date _____

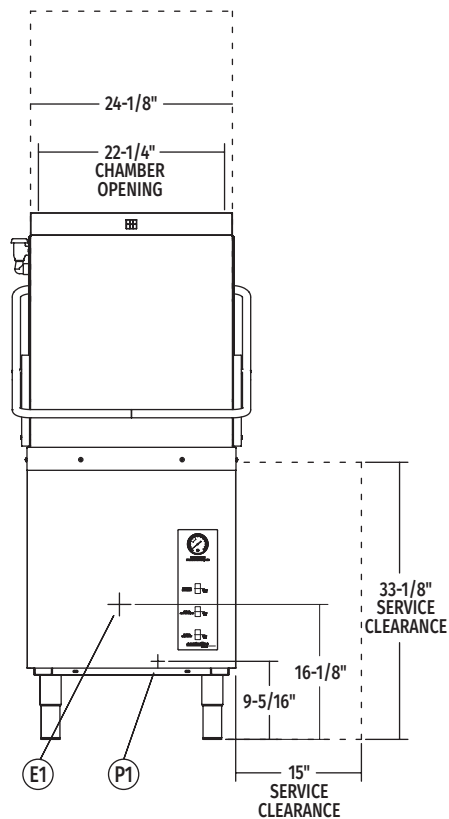


Front View

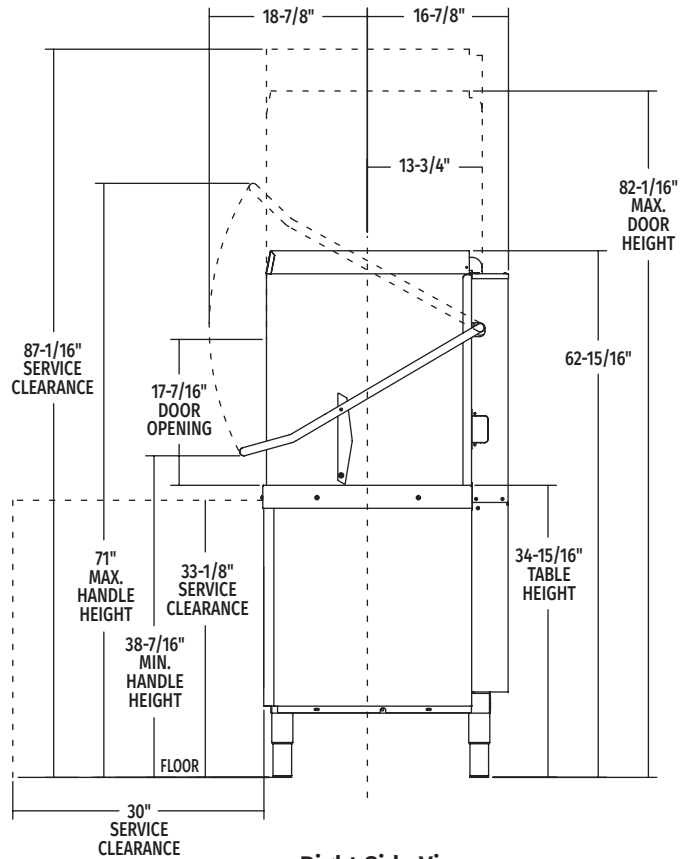

Right Side View

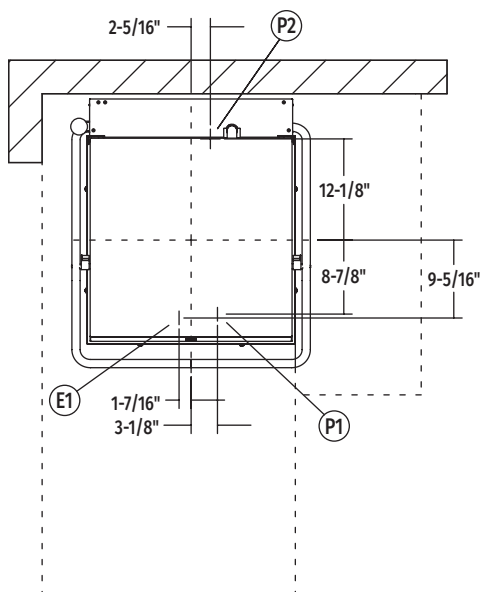


Top View

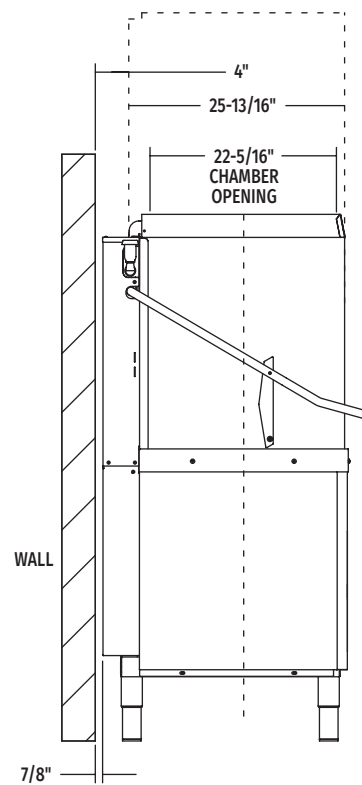


Left Side View

LEGEND

Electrical Connections	
E1	Electrical connection: 1-1/8" dia. hole for 1" trade size conduit; 8-3/4" AFF.
Plumbing Connections	
P1	Single fill and rinse connection: 3/4" female garden hose fitting on 9' long hose supplied with machine; 120°F water minimum for CDL 140°F recommended.
P2	Drain connection: 19mm barb fitting with 9' long hose supplied with machine.
P3	Chemical supply: Detergent, sanitizer and rinse aid; approximately 8-3/4" AFF. 9' long tubing supplied with machine.

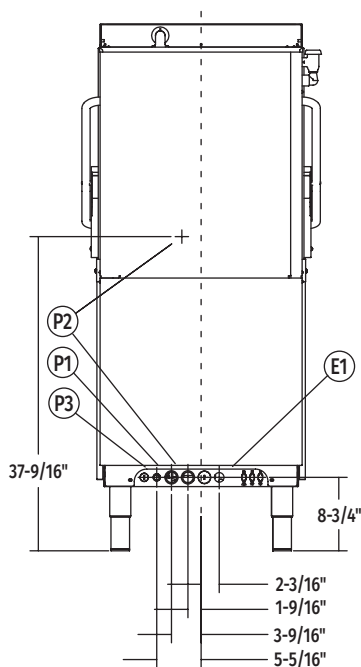

Back View

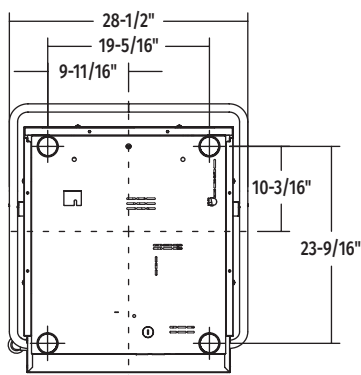

Bottom View

SPECIFICATIONS

Capacities

Racks per Hour (maximum)	51
Dishes per Hour (average 25 per rack)	1,275
Glasses per Hour (average 45 per rack)	2,295
Wash Tank (U.S. gallons)	4

Motor Horsepower

Wash Pump	0.52
Drain Pump	0.04

Rinse

Gallons per Rack	0.86
Gallons per Hour (maximum consumption)	43.9

Peak Rate of Drain Flow

Gallons per Minute (initial rate with full tank)	3.5
--	-----

Heating

Electric Heating Unit (kW)	2
----------------------------	---

Shipping Weight (approximate). 214 lbs.

Crated Dimensions 90.0"W x 30.0"L x 33.0"H

CDL Single Point Electrical Service Connection as Shown Below			
Elec. Specs	Rated Amps	Minimum Supply Circuit Ampacity	Maximum Protective Device
120/60/1	17.1	20	20

WARNING: Electrical and grounding connections must comply with the applicable portions of the National Electrical Code and/or other local electrical codes.

Plumbing connections must comply with applicable sanitary, safety, and plumbing codes.


Approximate Heat Gain to Space without Vent Hood	
Type	BTU/Hr.
Latent	2,300
Sensible	1,000

Plumbing Notes:

1. Water hammer arrestor (meeting ASSE-1010 standard or equivalent) to be supplied (by others) in common water supply line at service connection.
2. Recommended water hardness to be 3 grains or less for best results.
3. Recommended building flowing water pressure to the dishwasher is 20-25 PSI. If pressures higher than 25 PSI are present, a pressure regulating valve with internal thermal expansion bypass must be supplied (by others) in the water line to the dishwasher.
4. For convenience when cleaning, water tap should be installed near machine with heavy duty hose and squeeze valve.


Miscellaneous Notes:

1. All vertical dimensions taken from floor line may increase or decrease 1-1/4" depending on leg adjustment.
2. Vent hood (if required) to provide a minimum of 450 CFM exhaust (ref installation instructions).
3. Net weight of machine: 200 lbs.
Domestic shipping weight: 215 lbs.
4. Size of racks – 19³/₄" x 19³/₄".

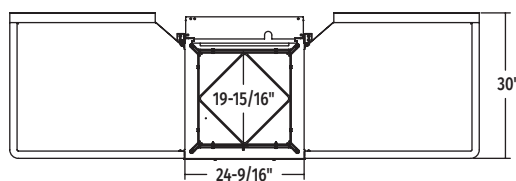

**PASS THRU
INSTALLATION**



TOP INSIDE VIEW OF MACHINE

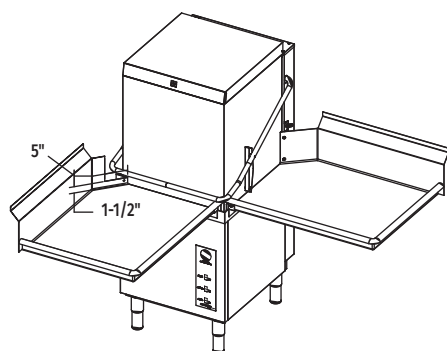

**CORNER
INSTALLATION**

NOTE: REPOSITION RACK
TRACK BRACKET FOR
CORNER INSTALLED UNITS


NOTCH FOR HANDLE CLEARANCE:
5" WIDE x 1-1/2" TALL
MEASURED FROM TABLE SURFACE

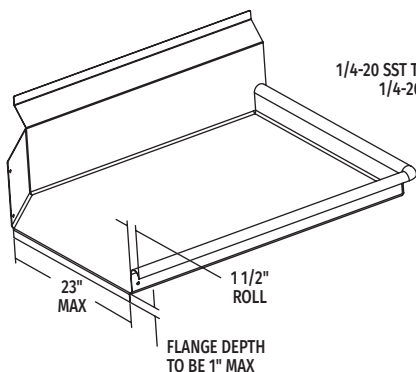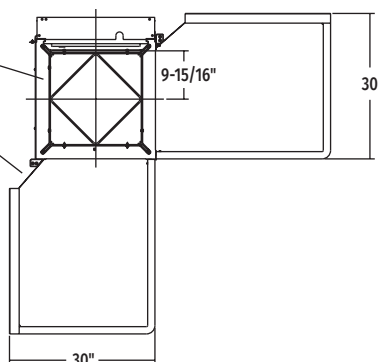

1/4-20 SST TRUSS HEAD SCREW
1/4-20 SST LOCKING NUT


TANK

SUGGESTED TABLE DESIGN



1/4-20 SST TRUSS HEAD SCREW
1/4-20 SST LOCKING NUT

USE SILICONE SEALER
BETWEEN TABLE AND
LIP OF TANK TO
PREVENT LEAKAGE

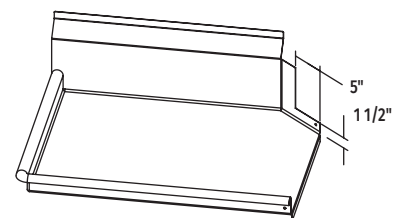

**CORNER TABLE
CUTOUTS**