

Amana® Commercial

Project #: _____

Item #: _____



High Speed Combination Oven Amana® Commercial Xpress IQ™ AXP22TLT

Superior cooking results FAST!

- 2000W impingement enhances browning. Easily adjustable 0-100% fan speed
- 200° - 520°F (95° - 270°C) convection temperature range
- 3000W Infra-red radiant enhances toasting, browning, and crisping
- 2200W dual side antenna feed microwave system heats quickly reduces cooking time

Simplifies cooking

- True-Touch™ HD Touchscreen. Fully customizable 7" (178mm) smartphone-like display
- Catalytic converter built-in for ventless operation
- Large interior easily accommodates a 14" (35cm) pizza

Multi-language universal operation, with programming flexibility

- Touchscreen and programming software supports 25 languages
- Image-based menu selection eliminates language and literary barriers
- Connectivity Standard: WiFi, Ethernet, and Smart USB standard

Cuts Costs

- Uses less energy than a conventional oven
- Eliminates need for pre-cooking and holding
- Uses standard metal trays, pans and screens

Safe operation and simple cleaning

- Inner door drops down below cooking surface for safe removal of food from cavity
- Porcelain IR element cover enhances operator safety and simplifies maintenance
- Infra-red element tilts-up for cleaning
- Non-stick oven liners preinstalled for easy cleaning
- Two removable, cleanable, and reusable air filters protect oven components

15 times faster than conventional ovens.

Xpress® Line | Heavy Volume
This category of high speed oven is ideal for...

Applications

- Theatres
- Convenience Stores
- Satellite Locations
- Healthcare
- Stadiums
- Pizzerias
- Hotel Room Service
- Campus Dining
- Snack Bars

Through put potential (per hour)

Food item	QTY per hour
12" (30cm) frozen pizza	21
6" (15cm) toasted sandwiches	80+
Grilled fresh Salmon	28
1 lb. (0.45kg) fresh shrimp	55
Toasted Bagel	120
Chicken wings	24
Quesadillas	70

Location of Oven(s):

- Kitchen countertop, single or stacked
- Kitchen shelf
- Equipment stand

All ACP, Inc. commercial ovens are supported by our Culinary Center. Do not hesitate to contact us for any questions regarding food preparation, menu development and cooking times: testkitchen@acpsolutions.com



Patents Pending

Included Accessories:

- Oven paddle (PA10)
- Non-stick liners (TL10)
- Cleaner Sample Kit (CK10)

Optional Accessories

- Panini grill plate (GR10)
- Panini Press (PRS10)
- Pizza Stone (ST10X)
- Square metal pan (SQ10)
- 4" (102mm) Leg kit (LG10)
- Non-stick baskets (NB10, OB10, TB10/S, SB10/S, MB10/S)
- Stainless cart/equipment stands: (CA24, CA30)
- Oven Cleaner and Shield Protectant (CL10, SH10)

Service

All products are backed by the ACP, Inc.
24/7 ComServ Support Center

Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at www.acpsolutions.com/warranty

Safety and Sanitation

This ACP, Inc. product meets and exceeds safety and sanitation standards set for commercial microwave ovens by UL, ETL, NSF, CSA, and FDA



866-426-2621




AIA File #:

Specification #:



Amana® Commercial Xpress IQ™ AXP22TLT | High Speed Combination Oven

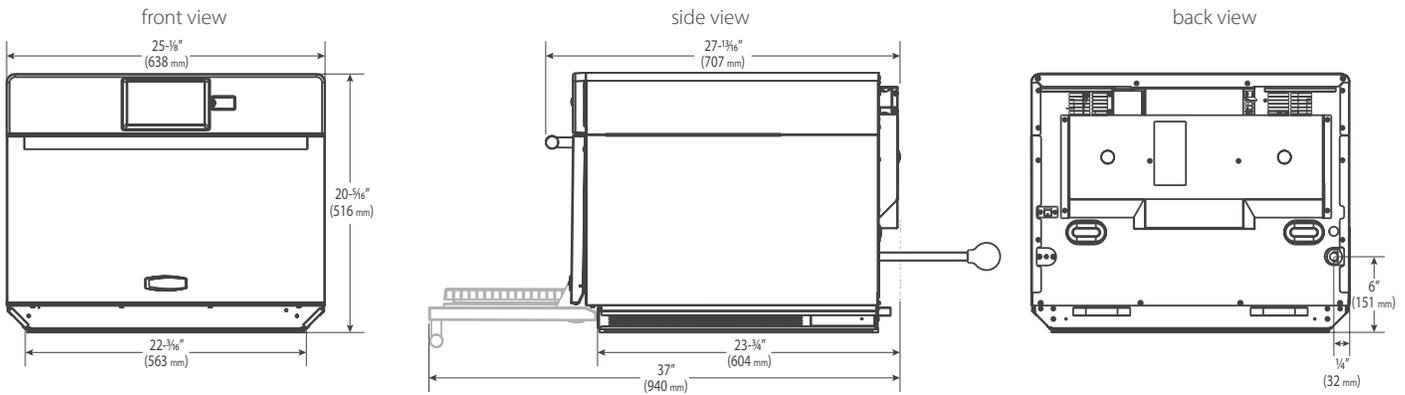

Drawings available from KCL CADlog - techs@kclcad.com

Specification #:

Dimensions			
Exterior	H 20 5/16" (516)	W 25 1/8" (638)	D† 27 13/16" (707)
Cavity	H 10" (254)	W 16" (406)	D 15" (381)
Usable Cavity Space	1.38 cubic ft. (39 liter)		
Door Depth	37" (940), drop down door		
Installation Clearances	Top: 2" (51)	Sides: 1" (25)	Back: None
Shipping Carton	H 24 1/2" (622)	W 34 5/8" (879)	D 32 5/8" (828)
Weight			
Product Weight	150 lbs. (68 kg)		
Ship weight (approx.)	175 lbs. (79 kg)		

Features	
Configuration	Countertop
Stackable	Yes
Display	7" (178) Capacitive Touch, High resolution LCD display
USB Port	Yes
Connectivity	Wifi and Ethernet
Program Menu	Tab & Multi-level menu capability
Menu Capacity	1200+ items
Max. Cooking Time	99:99
Temperature Range	200° - 520°F (95° - 270°C)
Microwave Distribution	Double side oscillating antenna
Fan Speed	0-100%
Power Levels	11
Defrost	Yes, microwave only, power level 2
Time Entry Option	Yes
Stage Cooking	Yes, 4
Catalytic Converter	Yes†
Automatic Voltage Sensor	Yes (North America only)
Air Filter	2 removable, with clean filter reminder
Rack	1 rack position, removable
Door Opening	Pull down, ergonomic handle
Exterior Finish	Stainless steel & Painted Steel
Interior Finish	Stainless steel

Measurements are US Standard. Measurements in () are millimeters.

* IEC 60705 Tested

† Includes handle

‡ Catalytic convertor filters grease and odors from the air. This product conforms to the Ventless Operation Recommendations set forth by NFPA96 using EPA202 test method

Electrical Configuration

Region	Model#/UPC	Power Consumption	Power Output/Cooking Power			Power Source	Plug Configuration	Cord Length	Frequency	Magnetron
			Impingement	IR-Radiant	Microwave					
North America single phase	AXP22TLT 728028377125	5700 W, 27.4 A	2000 W	3000 W	2200 W*	208-240 V, 60 Hz, 30 A, single phase	NEMA 6-30P	5 ft. (1.5 m)	2450MHz	2

AIA File #:



225 49th Ave. Dr. SW, Cedar Rapids, IA 52404 U.S.A.
800-233-2366 • 319-368-8120 • Fax: 319-368-8198
www.acpsolutions.com

Part No. 20271201
Updated 06/28/19

© 2019 ACP, Inc., Cedar Rapids, Iowa 52404

an Ali Group Company



The Spirit of Excellence