


**Refrigeration Equipment
Bar Equipment 2-door Refrigerator,
48", black with solid door (R290)**

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____

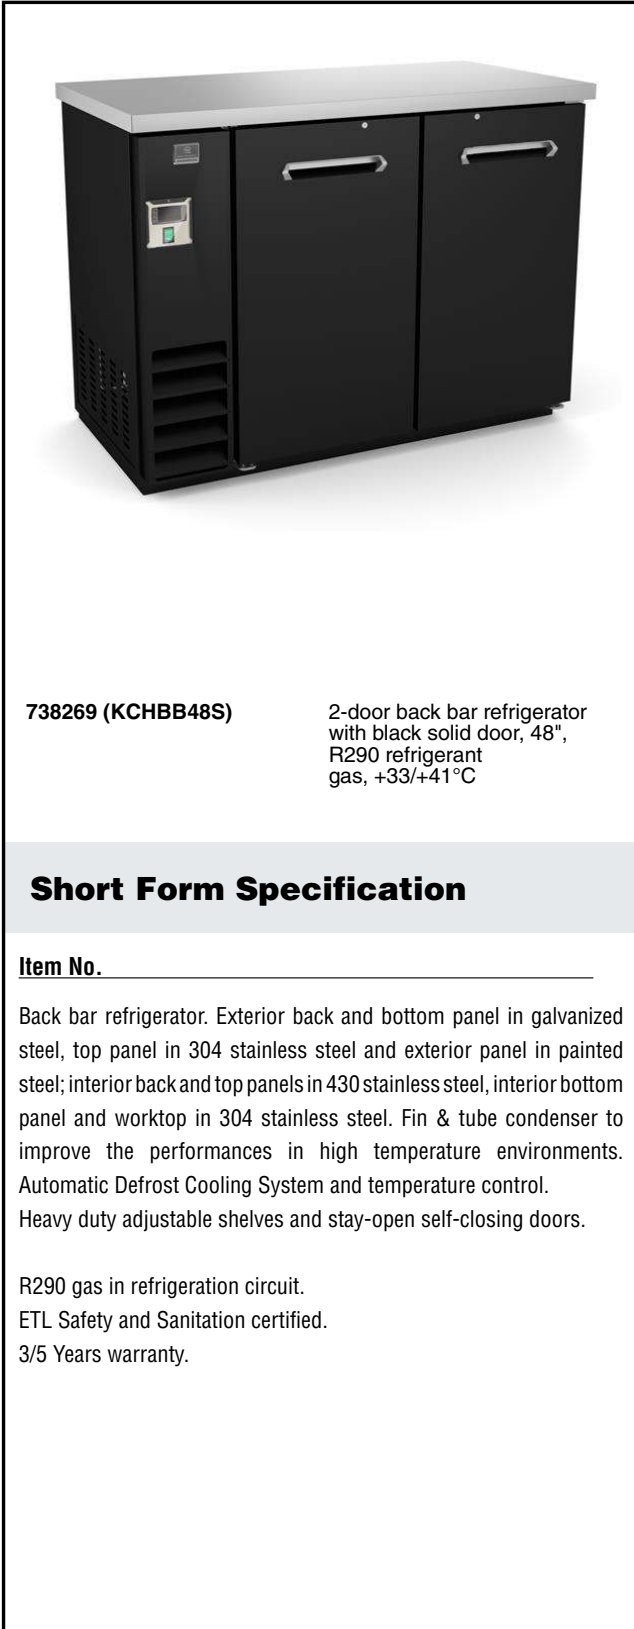

738269 (KCHBB48S)

2-door back bar refrigerator with black solid door, 48", R290 refrigerant gas, +33/+41 °C

Short Form Specification

Item No. _____

Back bar refrigerator. Exterior back and bottom panel in galvanized steel, top panel in 304 stainless steel and exterior panel in painted steel; interior back and top panels in 430 stainless steel, interior bottom panel and worktop in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Heavy duty adjustable shelves and stay-open self-closing doors.

R290 gas in refrigeration circuit.
 ETL Safety and Sanitation certified.
 3/5 Years warranty.

Main Features

- External digital temperature display.
- External temperature display.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Locking doors.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet and door insulated with high density polyurethane for low environmental impact.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.


Construction

- Lockable door.
- Self-closing door with 90-degree stay-open feature.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic door gasket removable without tools for easy cleaning.

Optional Accessories

- two shelves for 48" back bar (one right and one left shelves) PNC 880608
- shelf clips PNC 880611

APPROVAL: _____

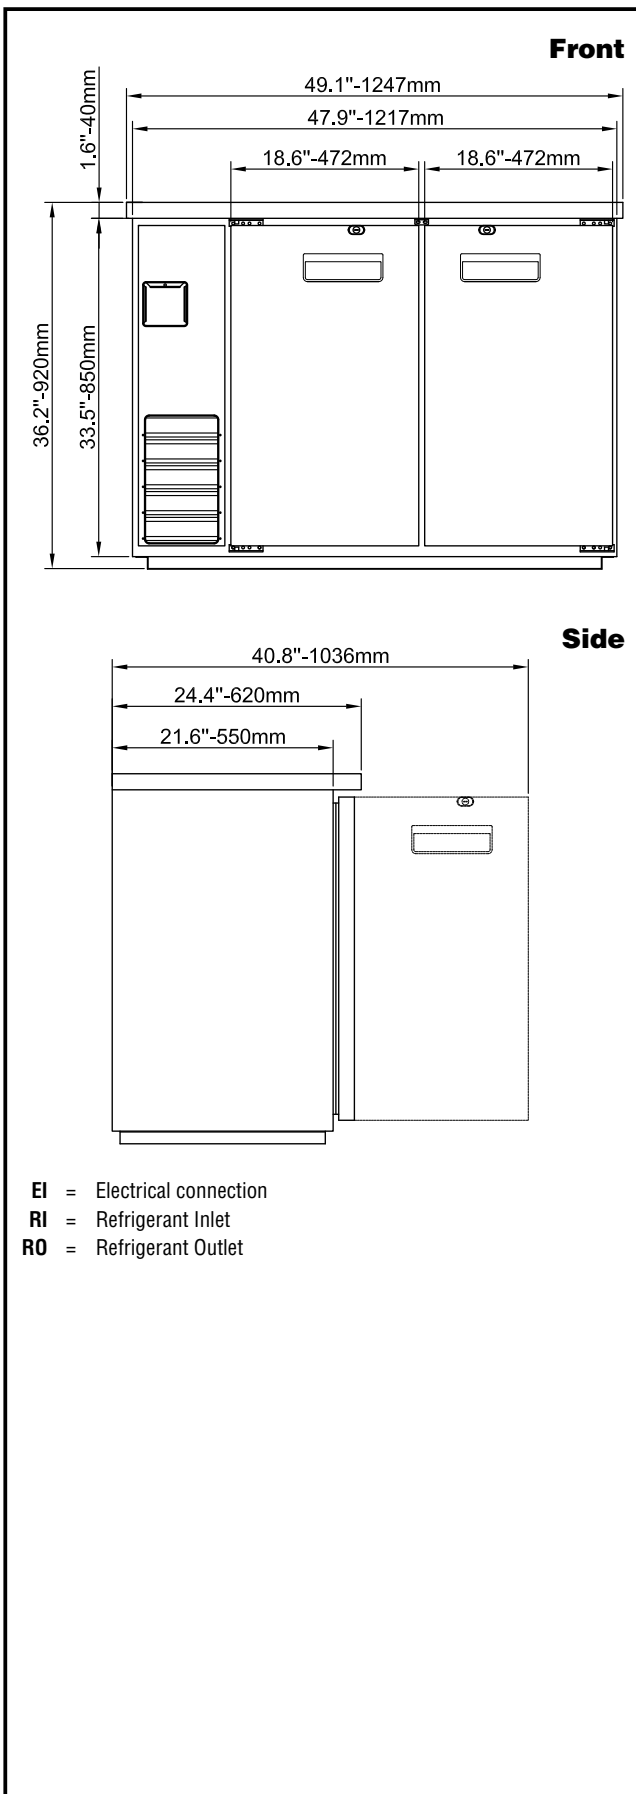

Electric

| | | |
|-------------------------------|-------------------|------------------|
| Supply voltage: | 738269 (KCHBB48S) | 115 V/1 ph/60 Hz |
| Electrical power, max: | | 0.3 kW |
| Current consumption: | | 3 Amps |
| Plug type: | | USA NEMA 5-15P |

Capacity:

| | |
|------------------------|--------------|
| Gross capacity: | 12.5 cu.feet |
|------------------------|--------------|

Key Information:

| | |
|---|--|
| Door hinges: | 1 Left+1 Right |
| External dimensions, Width: | 49 1/16" (1247 mm) |
| External dimensions, Depth: | 24 7/16" (620 mm) |
| External dimensions, Height: | 42 5/16" (920 mm) |
| Number and type of doors: | 2 Full |
| Internal Dimensions (depth): | |
| Internal Dimensions (height): | |
| Internal Dimensions (width): | |
| Shipping height: | 44 1/2" (1050 mm) |
| Shipping weight: | 265 lbs (120 kg) |
| Shipping volume: | 34.92 ft ³ (0.99 m ³) |
| Number and type of grids (included): | 4 - Vinyl-Coated Steel |
| Type of external material: | Black Prepainted Steel |
| Type of internal material: | Stainless Steel |
| Warranty: | 3 / 5 years |

Refrigeration Data

| | |
|------------------------------------|------------|
| Compressor Horsepower: | 1/5 |
| Refrigerant type: | R290 |
| Refrigerant weight: | 110 g |
| Operating temperature min.: | 32 °F |
| Operating temperature max.: | 41 °F |
| Condenser type: | Fin & tube |