


ITEM NO.

MODEL	DIM "A"	DIM "B"	DIM "C"
64734	2-1/4"	5-7/8"	6"
	[57mm]	[149mm]	[152mm]
64742	2-1/2"	6-3/8"	8"
	[64mm]	[162mm]	[204mm]
64750	3-1/8"	6-7/8"	10"
	[79mm]	[175mm]	[254mm]
64769	3-3/4"	7-3/8"	12"
	[95mm]	[187mm]	[305mm]
64777	4-3/8"	8-1/4"	14"
	[111mm]	[210mm]	[<u>3</u> 56mm]
64785	5"	8-7/8"	16"
	[127mm]	[225mm]	[406mm]

ROUGH-IN:

QUANTITY:

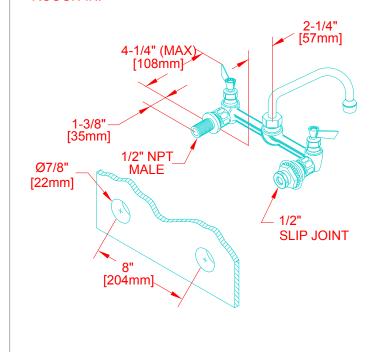

	MODEL:		
_	□ 64734	W/ 6" SWING SPOUT	
	□ 64742	W/ 8" SWING SPOUT	
	□ 64750	W/ 10" SWING SPOUT	
	□ 64769	W/ 12" SWING SPOUT	
	□ 64777	W/ 14" SWING SPOUT	
	□ 64785	W/ 16" SWING SPOUT	
	OPTIONS OR MODIFICATIONS:		
	☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH		

☐ DJ SUB-ASSY (7-1/4" OR 13") CIRCLE LENGTH

☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE

■ OTHER EZ INSTALL ADAPTER

FEATURES

☐ ELBOWS

CONTROL VALVE

* 8" C/C BACKSPLASH MOUNT

□ VANDAL RESISTANT KIT

- * SWIVELLING SEAT DISKS
- * HOT SIDE STEM RIGHT HAND
- * COLD SIDE STEM LEFT HAND
- * STAINLESS STEEL SEATS
- * STAINLESS STEEL SEAT SCREWS
- * STAINLESS STEEL HANDLE SCREWS
- * 1/2" SLIP JOINT

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE: 200 PSI MAX. STATIC
- * 2.20 GPM AT 80 PSI

SHIPPING WEIGHT

* 6.0 LBS