



Project:

Item Number:

Quantity:

CAYENNE® CORD AND PLUG HEAT STRIPS



Cayenne® Cord and Plug Heat Strip

Note: Must be used with legs - not pictured.

MODELS

72672019	18" (47.7 cm)
72675019	24" (60.9 cm)
72678019	30" (76.2 cm)
72681019	36" (91.4 cm)
72684019	42" (106.6 cm)
72687019	48" (121.9 cm)
72693019	60" (152.4 cm)

Note: All models require either 13" (33 cm) C legs or Adjustable T-legs. See back page for details.

DESCRIPTION

The Cayenne® Heat Strip is intended to be used as a heat source to help maintain food at safe temperatures until served.

FEATURES

- ☐ Structurally engineered aluminum heater housing offers maximum strength with minimal weight
- ☐ Recessed dovetail channel allows for installation of decorative trim
- ☐ Optional Kool-Touch® thermoplastic trim drastically reduces fascia temperature for safer operation
- ☐ Reflector generates maximum performance for wider heat dispersion and offers larger temperature zone above 140°F (60° C) for safe food holding
- ☐ Anodized bright aluminum heat reflector generates more even heat over food display area
- ☐ Reflector/heater assembly is field adjustable allowing operator to direct heat pattern for optimum overhead heat
- ☐ Sheathed element for dependability and longer life
- ☐ Unique element design offers greater heat dispersion for more effective warming
- ☐ Two screws allow quick service access to element
- ☐ Provided with onboard toggle switch controls
- ☐ One year parts and labor warranty. Additional one year warranty on heating element (parts only).
- ☐ 6-ft. (182.8 cm) cord and plug

Note: All heat strips are custom ordered and therefore cannot be cancelled or returned per Vollrath Terms & Conditions.

Agency Listings



HEIGHT RECOMMENDATIONS

Recommended distance from the Cayenne® Heat Strip to the surface below to keep food at ideal temperatures:

Over Non-Combustible Surface		Over Combustible Surface	
Minimum Height	Maximum Height	Minimum Height	Maximum Height
11" (27.9 cm)	16" (40.6 cm)	13" (33.2 cm)	16" (40.6 cm)

Note: Minimum height is the UL required minimum distance over a combustible or non-combustible surface.

Note: Maximum height is the maximum height to retain food quality under normal conditions.

UL REQUIRED CLEARANCES

Clearance	Non-Combustible Surface	Combustible Surface
Top of strip to surface above (minimum)	1" (2.5 cm)	2" (5.1 cm)
Bottom of strip to surface below	See table above.	
Side of strip to adjacent surface (minimum)	1" (2.5 cm)	5" (12.7 cm)
Setback from front opening on pass thru application: maximum of 8" (20.3 cm)		

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

Approvals

Date

Due to continued product improvement, please consult www.vollrathco.com for current product specifications.



Setting
the Standard™

www.vollrathco.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462

CAYENNE® CORD AND PLUG HEAT STRIPS

MOUNTING OPTIONS



T-Leg



C-Leg

☐ Legs

Leg Style	Item Number
T-Leg Adjustable 8" to 15" (22.8 to 38.1 cm)	44504
C-Leg 13" (33.0 cm)	4450613


ACCESSORIES

☐ Kool-Touch® Trim



Item No.	Description
17897xx	Enter unit length at end of part number to add this accessory. One set includes operator and server side coverage. Field trimming required.

DIMENSIONS

☐ All dimensions are in inches (cm). All weights are in Lbs. (kg).

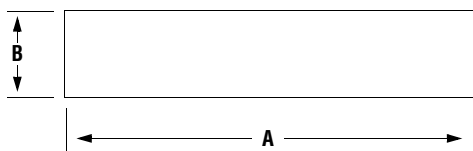

Front View

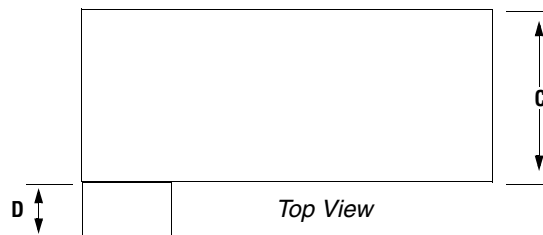



Top View

Control Box

SPECIFICATIONS

(A) Length	Item Number	(B) Height	(C) Width	(D) Additional Width of Control Box	Amp Draw (120V)	Heater Wattage	Approximate Shipping Weight	Plug
18" (47.7)	72672019	2.88" (7.32) All Units	6" (15.24) All Units	3" (7.62) All Units	3.5	415	6.1 (2.7)	5-15P
24" (60.9)	72675019				4.6	550	7.2 (3.2)	5-15P
30" (76.2)	72678019				5.8	690	8.3 (3.7)	5-15P
36" (91.4)	72681019				6.9	825	9.3 (4.1)	5-15P
42" (106.6)	72684019				8.0	965	10.4 (4.6)	5-15P
48" (121.9)	72687019				9.2	1100	11.5 (5.1)	5-15P
60" (152.4)	72693019				11.5	1380	13.8 (6.2)	5-20P

Receptacles

Setting
the Standard™

www.vollrathco.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832
Technical Services Fax: 920.459.5462